



i-on EX **160**

Up to 160 zone hybrid intruder alarm panel: **i-on160EX**



COOPER Safety

Decimal expansion system

The new expanders have 10 zones (30 radio zone option available) in addition to the 10 zones on the end station. Zone identification on expanders is now considerably easier

Performance bus

Installers can fit up to a total of 45 devices on to the i-on160EX bus enabling far greater and more flexible expansion than any other panel on the market

Semi-auto addressing

Prevents address duplication for bus mounted devices, saving hours of installation diagnostic time

Audible bus device tracing

Enables an installer to locate any bus device quickly and easily; reducing the time taken to complete maintenance and service calls

Product Compatibility


	Description
Compliance	PD6662:2004 amendments 1 and 2, EN50131-3:2009 and EN50131-6:2008 Grade 2 or 3 and environmental class 2
Zones	10 on board, expandable to 160, all fully programmable
Bus Devices	Accepts up to 45 bus devices (of which 15 can be expanders)
Proximity Reader	The wired and wireless keypads contain a proximity reader as standard
Partitions	20 independent partitions or full set and three part sets
Event Log	2000 events; 1,500 mandatory events and 500 non-mandatory
Users	Up to 500 users with 4 or 6 digit user codes, with the option for each user to add a proximity tag, radio remote control* and radio panic button*
Internal Sounder	Panel: Two independently controlled 16 Ω speakers Wired expander: one independently controlled 16 Ω speaker Radio expander: one independently controlled 16 Ω speaker
Outputs	Panel: Two programmable relay outputs, two 500mA open collector programmable outputs, 16 communications low-current outputs Radio expander: Eight radio outputs Wired expander: 4 x 100mA, open collector programmable
Remote Communications	i-on footprint for connection of a range of alarm communications modules as described below
Configurations Options	i-on Downloader via USB or plug-on comms module, web browser via built in Ethernet port
Power Supply	3Amps, conforms to EN50131-6 Type A power supply, rated power output 1.1Amps whilst charging two 17Ah batteries
Battery	Accepts two 12v standby batteries up to 17Ah rechargeable lead acid, gel type. Independently charged and monitored
Dimensions	Panel: 427 x 400 x 101mm Keypad: 115 x 156 x 34mm Expander: 230 x 144 x 44mm
Weight	Panel: 6Kg Keypad: 0.26Kg Expander: 0.42Kg
Temperature Range	Environmental class 2 -10°C to 55°C @ 0-93% RH

*Requires radio expander EXP-R10 or EXP-R30

Ancillaries

Model		Description
I-KP01	Wired Keypad	Elegant and easy to use keypad with intuitive menu structure
I-RK01	Wireless Keypad	Set and unset the system using your code or a prox tag
I-FB01	Remote Control	Set and unset the system from a keyring fob
EXP-W10	Wired 10 zone expander	Add 10 wired zones and up to 4 wired outputs, uses new i-on bus system and features audible bus device tracing.
EXP-R10	Radio 10 zone expander	Add 10 radio zones and up to 8 radio outputs, uses new i-on bus system and features audible bus device tracing. Can be used as a gateway for radio PA's and remote controls
EXP-R30	Radio 30 zone expander	Add 30 radio zones and up to 8 radio outputs, uses new i-on bus system and features audible bus device tracing. Can be used as a gateway for radio PA's and remote controls
I-DIG02	Digital Communicator	Connect to central station or send SMS messages to phone numbers of your choice
I-SD02	Plug-in SD/comms module	Connect to central station or send SMS messages to phone numbers of your choice. This can also be used to send voice messages to pre-programmed telephone numbers
ADSL01	ADSL Filter	Essential for a broadband enabled phone line
I-GSM02	GSM Dialler	Use GSM network to connect to central station or send voice messages or SMS to phone numbers of your choice
I-RC01	4 Relay Board	Converts transistorised outputs to relays
08750EUR-00	Ethernet	Requires IRIS receiver installed at central station
08844EUR-50	GPRS	Requires IRIS receiver installed at central station

Installer Details :

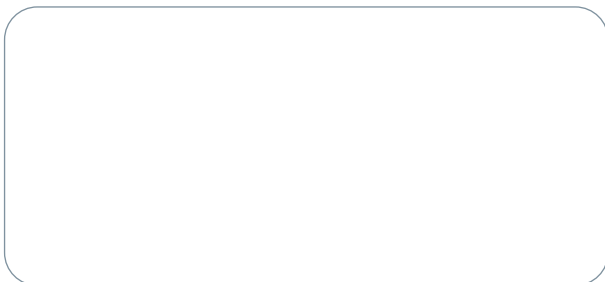

**For information on your local stockist
contact our Marketing Department**

telephone: +44 (0)1594 541 979
fax: +44 (0)1594 545 445
email: marketing@coopersecurity.co.uk

SCAN-008-0810 V2

www.coopersecurity.co.uk

COOPER Safety

All Cooper logos are valuable trademarks of Cooper Industries in the U.S and other countries. You are not permitted to use Cooper trademarks without the prior consent of Cooper Industries.