



Thinking about performance : Quality products designed to perform

Scantronic 9751EN

PPD6662: 2004 GRADE 2 DD243: 2004

Hybrid Range 868MHZ Narrowband Radio

 **COOPER** Safety



The Scantronic 9751EN is a fully programmable, 8 zone security alarm panel expandable up to 24 zones, designed to conform to PD6662:2004 Grade 2 system requirements.

Fully compliant with EN50131, PD6662: 2004 Grade 2, DD243: 2004

8-24 zone control panel complete with 9941EN LCD non prox keypad, or 9943EN LCD prox keypad

8 fully programmable zones on board, expandable to 24 (CC with GT or 2 wire FSL)

Choice of hardwire or radio 868MHz narrowband expansion

Built-in multi format communicator and 300 baud V21 modem

Alarm reports can be fast format, contact ID or SIA 1, 2 or 3

Full remote UDL, remote control, remote servicing and system diagnostics via PC-based Windows™ downloader program

8 fully programmable secondary communications outputs

3 fully programmable transistorised panel outputs

Accepts up to four LCD keypads

Full (A) and 3 part-sets (B, C and D)

Partition option

700 event log with date and time stamped


Product Compatibility

Model	Description
PD6662:2004 Compliance	Grade 2, Environmental Class II, for both wired and radio expansion, ATS 2
Zones	8 fully programmable, expandable to 24 (CC, with global tamper on panel, or 2 Wire FSL)
Panel	9751EN-41 blank end-station control panel and 9941 LCD keypad without prox
Keypads	Accepts up to 4 x 9941 and 9943 remote keypads (in any combination)
Proximity Reader	The 9943EN keypad includes a proximity reader as standard
Display	Full feature plain text LCD display, 2 x lines, 16 characters per line
Level Setting	A = Full set. B, C, and D offer part set options
Partitions	A, B, C & D buttons offer 4 x fully independent partitions, each with individual entry/exit timers
Event Log	700 event log with date and time stamped, viewed or downloaded
Expansion	Via a choice of 8-zone wired expanders or 8 or 16-zone 868MHz radio expanders
Keyswitch	Key-switch zone type, full = A, part = B setting/unsetting, disarm and reset.
Codes	50 x 4 or 6 digit user and/or proximity tags, 1 engineer code
Internal Sounder	Accepts up to 2 x 16 ohm internal sounders, exit/entry tones via internal sounder with electronic volume control (A-Set in partition mode)
Output Types	3 open collector, programmable outputs
Remote Communications	Multi-format alarm reporting via a built in communicator, 8 channel fast format, SIA I, II or III or Contact ID
Modem	Built in CCITT V21 – 300 BAUD half duplex
Downloader	Remote downloader facilities for programming, diagnostics and remote control using Cooper Security multi-product downloader software, Windows-based, secure callback (with dynamic third call-back number), answerphone defeat option and unattended mode, manual call out
Remote Diagnostics & Servicing	Designed to conform to the BSIA Remote Service COP, remote tests include read zone resistances (panel & expander), zone activity, RFX signal strength, PSU voltages, current, battery charge current, battery load test, remotely trigger output tests, communications test, operate system with a virtual keypad
Power Supply	Conforms to EN50131-6 Type A power supply, rated power output 580mA
Battery	Will accept a 12v standby battery upto 7Ah rechargeable lead acid, gel type
Dimensions (W x H x D)	Control panel: 245 x 235 x 90mm - 9941 keypad: 115 x 115 x 25mm
Weight	Control panel = 3.3 kg 9941 keypad = 205gm
Temperature Range	Environmental Class II -10 C to 55 C @ 75% RH
Secondary Communications Outputs	Any wire-in secondary communication device via 8 fully programmable outputs
09954EN-00	8-zone hard-wired expander for use with all 9x5x control panels
RFX08	8-zone radio expander, 868MHz Class VI. PD6662: 2004 Grade 2

Keypad Compatibility

Model	Description
09941EN	LCD keypad without PROX interface or tag
09943EN	LCD keypad with built-in prox and ability to connect AX10 remote prox unit
AX10	Remote prox unit - can be connected up to 5m from the 09943EN keypad
PROXTAGPK5	Prox tags (pack of 5)
Model	Description
9751EN-41	Complete with 9941EN LCD non prox keypad
9751EN-43	Complete with 9943EN LCD prox keypad

Installer Details :

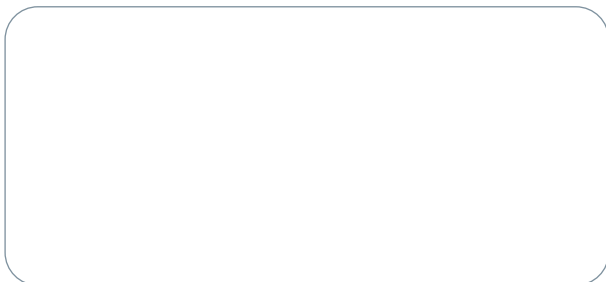

For information on your local stockist
contact our Marketing Department

telephone: +44 (0)1594 541 979

fax: +44 (0)1594 545 445

email: marketing@coopersecurity.co.uk