

## Product Data Sheet: CPT EN54 Approved



### Description


Our new CPT has been approved to EN54 part 11 and is available for either flush or surface mounting thus making it attainable to suite an installers requirements and allow ease with installation.

The CPT EN54 Approved comes complete with an interchangeable glass element which comes intact with a plastic film covering to protect the end user from injury when triggering the alarm and also to avoid any stray glass fragments from causing any damage.



Glass replacements are available in packs of 3 using part number 308-028.

To ensure that your CPT is in correct working order the unit is supplied with a test key which can be inserted through the bottom of the product to check reliability.

The CPT has also been designed for compatibility with the majority of conventional fire alarm systems.

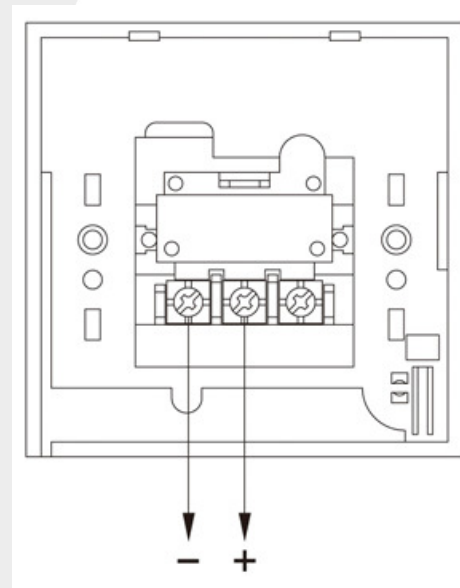

### Dimensions

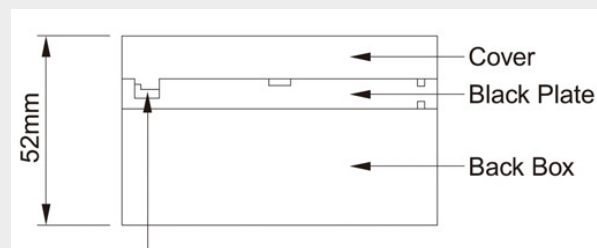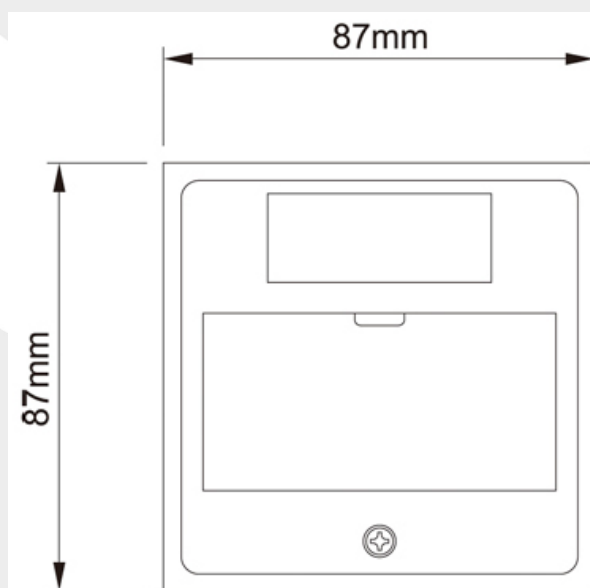

### Technical Information

	Specification
Operating Contact:	6A 125/250V AC
Temperature Range:	-25° C ~ +85° C
Dimensions:	88mm(H) x 88mm(W) x 52mm(D)
Weight:	165g
Internal Resistance:	470 Ω