

The VDM15 is the strongest fixed vandal dome available on the market. The housing integrates a die-cast aluminium case rated IP66 with a scratch resistant polycarbonate bubble that can withstand heavy impacts. It can be surface or flush mounted both internally and externally and features NTP standard conduit entries for easy cabling. The unique conical shape with its numerous mounting points allows for greater security and less chance of physical interference. The camera module features a wide 2.9~10mm lens and is supplied on a 3-axis gimbal to allow positioning in any direction. It incorporates the latest Sony HQ1 DSP technology offering low light performance and providing clear video images of more than 540 TVL in the day and at night. Designed for the toughest environments, the VDM15 series is the perfect solution to secure prisons but also other external industrial, commercial, education and retail environments. It provides an absolute vandal proof performance combined with an outstanding video image quality.



VDM15TP22H29V10I



Features

- Indoor/Outdoor Surface or Flush Mount
- Built to IP66, impact protection >IK10⁺³
- Die-cast aluminium construction with impact and scratch resistant polycarbonate bubble (tinted also available, conditions apply)
- Side and rear 3/4" (25mm) NPT conduit fittings
- Unique conical shape with numerous mounting points
- No ligature points
- 12VDC/24VAC Power Supply Converter for the Camera
- 3-Axis gimbal
- Day Mode: 540 TVL, Night Mode: 570 TVL
- Mechanical IR cut filter
- 1/3" Format CCD
- 0.25 Lux @ F1.2
- 2.9~10mm lens
- User configurable BLC, Flickerless, AGC, AWB, Day & Night
- Infra red sensitive



Flush mount made easy with the extending locking arms



3-Axis Gimbal Chassis

General Specifications of the Housing

Material	Heavy duty die-cast aluminum lid and ribbed surface mount ring Triple honeycomb construction to prevent damage from side/lateral impacts Conical shape reducing ligature points and offering better deflection characteristics when attacked Polycarbonate bubble Fully supported dome bubble to prevent bubble from being pushed in Dome liner to reduce glare and obscure camera position Rigid gimbal assembly that does not change position on impact
Weight	1.2Kg / 2lb 9.5oz (excluding camera)
Dimensions	Diameter: 180mm / 7" (surface mount) 168mm / 6" (flush mount) Height: 102mm / 4" (surface mount) 67mm / 3" (flush mount)
Integrity	Weatherproof, IP 66
Impact Protection Rating	Exceeding IK10 ⁺³ (120J)
Voltage	12VDC / 24VAC
Fixing	Wall and ceiling mount - surface or flush mount 7 mounting points in surface mount configuration for extremely strong mounting, prevents sheering or mounting hole failure from side/lateral impacts Sloped sides with no ligature points in surface mount configuration
Cable entry	Side and rear 3/4" NPT conduit fittings
PCAs supported	SPS, Service Jack/OSD/Thermostat, UTP and Heater

General Camera Specifications

Image sensor	1/3" Interline CCD Sensor
DSP	HQ1
Pixel Element	PAL 752 (H) x 582 (V) approx. NTSC 768 (H) x 494 (V) approx.
Scanning Frequency	PAL 2:1 Interlace / H: 15625, V: 50Hz NTSC 2:1 Interlace / H: 15750Hz, V : 59.94Hz
Operation Temperature	-10°C ~ +50°C
Storage Temperature	-30°C ~ +60°C
Power Source	DC12V +/- 15% (supplied from housing)
Power Consumption	4.2W max
Lens Mount	Direct Mount
External Dimensions	38mm x 38mm, two stack
Certification Standard	CE / FCC

Functional Specifications


Exposure Control	DC Auto Iris lens
BLC	Central Area for DC Auto Iris lens
White Balance	AWB / AWB-EX
Auto White Balance Range	AWB 2700K~11000K, AWB-EX 2000K~18000K
Day & Night	TDN / Colour only
AGC	Normal / EX
Sharp	ON / OFF
D/N Level	LOW / HIGH
Line Lock Phase adjust Range	0° ~ 270°
Line Lock Frequency Range	50Hz ±1Hz

Video Specifications

Resolution	540 TV Lines
Minimum Illumination	Day mode: 0.65 lux @ F=1.2 (40 IRE Video Output) Night mode: 0.25 lux @ F=1.2 (40 IRE Video Output)
Video Output	1.0Vpp 750hm BNC unbalanced
S/N Ratio	50dB
H Aperture	10 IRE (r 0.45 100IRE Video Output)
V Aperture	10 IRE (r 0.45 100IRE Video Output)
Gamma Compensation	0.45

Functional Control or Adjustments

Exposure Control	DC Drive Lens
TDN	OFF/ ON Switchable
AWB	AWB / AWB-EX
BLC	OFF/ ON Switchable
AGC Selectable	AGC-EX / AGC Turbo
SYNC System	INT/ LL
Flickerless	OFF/ ON
ABW Range	AWB / AWB-EX
V-Phase	Var-Resistor on side panel
Lens Level Control	Var-Resistor on side panel

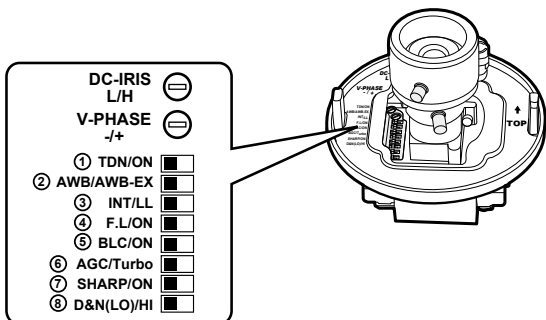

Lens Data - 2.9~10mm


Mounting Type	Ø 14 direct mount
Type of Focal	Varifocal
Type of Iris	DC Drive Auto-Iris 2.9~10mm Focal Length
Iris	F1.2 ~ 360 Diagonal: 125.0°~ 36.0° Horizontal: 94.6° ~ 28.8° Vertical: 68.4° ~ 21.6°
Minimum Object Distance	0.15m
Dimensions	Ø29 X 39 x (40.7)mm
Lens	Aspherical

Service Cable SVC-CABLE (Optional)

Service lead for easy configuration and focusing of the camera when installed. Installer-friendly.
Length: 3 ft (92cm).



Service Jack



UTP Transmission kit (Optional)

UTP transmission kit to transmit video signals over unshielded twisted pair cables.
VD-UTP-NVTRJ45: UTP with RJ45 connector.
VD-UTP-TB: UTP with screw terminal block.



Heater Kit D200-HTR (Optional)

Power input: 24VAC only.
Allows the camera module to operate down to -30°C.

