

Our discreet 500 TVL vandal domes are the ideal low-cost solution for retail applications. They can be easily mounted on the wall or the ceiling and come with an optional Quick Install Pipe that reduces installation time to a minimum.

- 500 TVL
- 12VDC
- 4.0-9.0 mm
- IP66
- >IK10+3 icon"/> >IK10+3






VDP25CP12H4V91

Features

- Polycarbonate vandal resistant dome
- Built to IP66, impact protection >IK10+3
- Surface or flush mount
- Resolution: 500 TVL
- Sony SS11X DSP
- 1/3" Format CCD
- 4~9mm DC Iris lens
- 1.2 Lux @ F1.6
- 3-axis gimbal
- Operates on 12VDC
- Optional Quick Install Pipe



Flush mount made easy with the extending locking arms

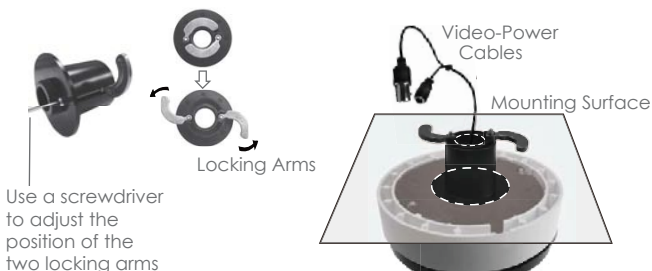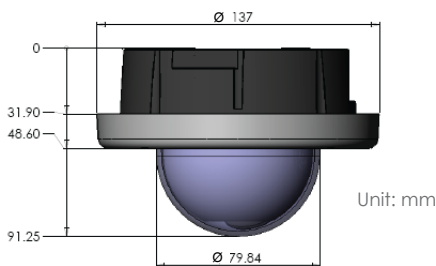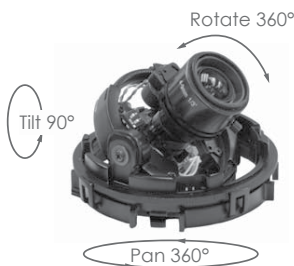

General Specifications

Material	UV stable polycarbonate material for base, shroud and bubble
Bubble	Clear bubble with liner (tinted bubble also available, terms apply), elongated to support 90 degree rotation
Gimbal Integrity	3-axis ratchet gimbal
Impact Protection Rating	IP66 Vandal Resistant enclosure with Security Torx screws
Fixing	Exceeding IK10+3 (120J)
	Surface or flush mount
	Supports direct mount to US single gang box mount
	Supports direct mount to UK metal electrical box
Lens type	4-9mm F1.6 AI/VF lens
Resolution	500 TVL with basic 2 dip function for AGC & BLC
Image size	1/3" Interline CCD sensor. 752H x 582V pixels
DSP	Sony SS11X
Sensitivity	1.2Lux @F1.6
Voltage	12VDC $\pm 15\%$ only
Operating Temp.	-10°C~+50°

Lens Specifications

Type of Focal	Varifocal, 4.0~9.0mm
Type of Iris	DC Drive Auto-Iris
Iris Range	F1.6 ~ 360
Field of View	Diagonal: 92.8°~39.4° Horizontal: 71.0°~31.6° Vertical: 51.6°~23.6°
Minimum Object Distance	0.15m
Lens Type	Aspherical

Quick Install Kit MD-QIP (Optional)

Installer friendly.
Universal ceiling/wall mount.
Reduces installation time to a minimum.

