

FRS 20

Energy-saving marvels for many different places.

The new FRS-20-light combines sensor-technology, low-energy light source and ultra slimline design. The result – a light for unlimited of different uses.

Settings

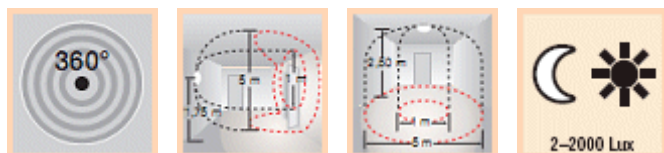
- Infinitely variable, electronic reach setting from Ø 1 – 5 metres.
- Easy adjustment of light "ON" time and twilight threshold by control dial.

Operational reliability

- Bulbs work independently of each other (so light stays "ON" even if one of the bulbs is faulty).



**IMPACT-RESISTANT
MATERIAL**

**Main features at a glance****FRS 20**

Prod. No. **white**
Dimensions (hwxwd)

743512
300 x 195 x 63 mm

Output	2 x 11 W / 2G7 (bi-tube low-energy bulb), additional switching capacity 200 W max. / e.g. bathroom / WC extractor fan
Voltage	230 – 240 V, 50 Hz
Angle of coverage	360° with 160° aperture angle also through glass, wood and stud walls
Transmitter power	approx. 1 mW
HF system	5,8 GHz
Reach	1 – 5 m dia., infinitely variable
Twilight setting	2 - 2000 lux
Time setting	5 sec. – 15 min.
Enclosure	IP 44
Protection class	II
Impact-resistant	IK 7
	Subject to technical modifications



[print](#) [close](#)