


M-Series

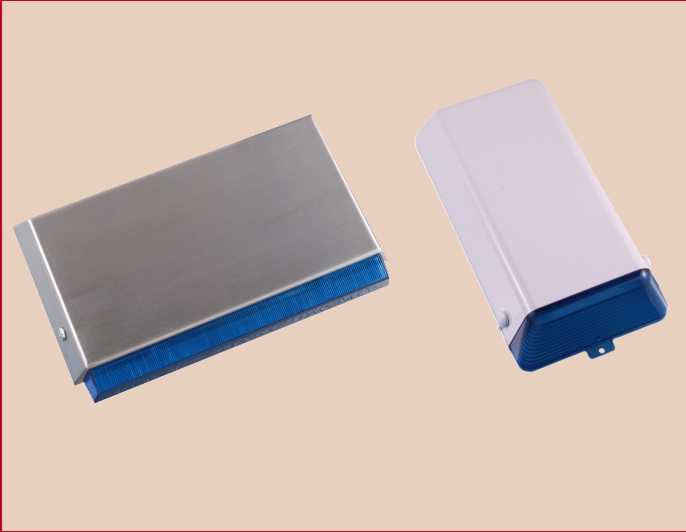

From left to right: Xcluder; Ultra

Features

- Twin piezo giving 118dB(A)
- Corrosion-resistant brushed stainless steel cover (Xcluder)
- Steel backplate for maximum strength
- Internal steel shroud offers double protection of electronic
- Up to four tamper protection devices
- High visibility xenon strobe
- Weatherproof to IP55
- Easy to install

Overview

The Flashguard M-Series consists of two double skinned security sounders, each with an internal 2mm mild steel shroud for superior internal protection.

The horizontally mounted Xcluder has an all-round stainless steel case while the vertically mounted Ultra has a durable 3mm polycarbonate cover with a choice of lid and lens colours.

Both units have a large area available for a screen print logo.

- Fire
- Security
- Industrial
- Railway/Marine
- Hazardous Area
- Public Warning

Applications

- Residential; shops; offices; public buildings; banks

Screen Print Information

- Xcluder: area available for logo - 260mm x 140mm
- Ultra: area available for logo - 110mm x 260mm

Xcluder Sounder Unit

Sounder type:	Twin piezo
Sounder output level @ 1m:	118dB(A)
Strobe frequency:	1Hz
Supply voltage:	10-15V
Current (Sounder):	400mA
Current (Strobe):	130mA
Current (Standby mode):	35mA
Battery:	8.4V 280mAH NiMH
IP rating:	IP55
Lid colours:	N/A
Lens colours:	Blue

Ultra Sounder Unit

Twin piezo
118dB(A)
1Hz
10-15V
400mA
110mA
55mA
8.4V 280mAH NiMH
IP55
White/red/yellow
Blue/red/opal