

SMT-1721 / 1921

17" / 19" TFT-LCD Monitor




- 1280 x 1024 Resolution
- 1000:1 High Contrast Ratio
- 300cd/m² High Brightness
- 5ms Response Time
- BNC Loop Through, S-Video, VGA Inputs
- Built-in Speakers
- Tempered Glass


Specifications

Model		SMT-1721	SMT-1921
Broadcasting System		NTSC/PAL System	
Panel	Inch	17"	19"
	Resolution (HxV)	1280 X 1024	
	Brightness(cd/m ²)	300	
	Contrast	1,000:1	
	Response Time	5msec	
	Viewing Angle Degree	80/80/80/80	
	Active Display Area(mm)	337.92 x 270.34 (HxV)	376.32 x 301.06 (HxV)
Picture	Pixel Pitch(mm)	0.264 x 0.264 (HxV)	0.294 x 0.294 (HxV)
	Scan System	Progressive	
Video	Color System	NTSC 3.58 / PAL 4.43	
	2D Comb Filter	Yes	
	Noise Reduction	Yes	
	PIP	Yes	
	Freeze	Yes	
	Under Scan	Yes	
Audio	Composite	2ch input, 1.0Vp-p, 75Ω terminated, Loop Through out, BNC Type	
	S-Video	1ch input(Y/C), Loop Through out	
	VGA	1ch input	
OSD	Language	2ch input, 2W Stereo, RCA Type	
HAS Stand	Language	11 Language (Eng/Fre/Ger/Spa/Ita/Rus/Swe/Por/Kor/Chn/Jpn)	
	Lift	0 ~ 100mm	
	Tilt	-5 ~ 25°	
Weight	Swivel	-165° ~ +165°	
	Weight	5.95Kg	6.85Kg
Power Requirement		AC100 ~ 240V	
Power Consumption		42W	
Dimensions (mm)	Lowest	371 x 368 x 220 (WxHxD)	412 x 398 x 220 (WxHxD)
	Highest	371 x 468 x 220 (WxHxD)	412 x 498 x 220 (WxHxD)

Dimensions (unit:mm)

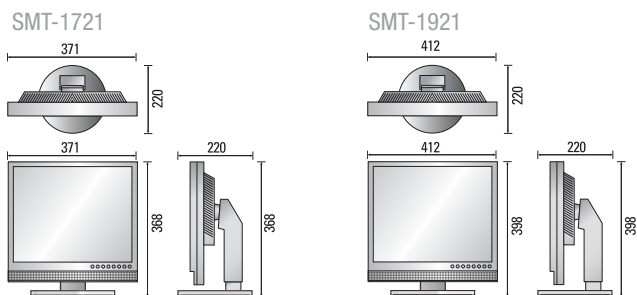

Side Panel

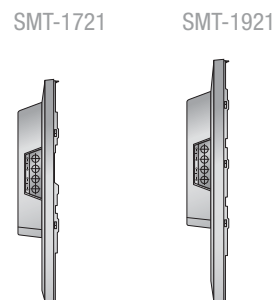

* Design and specifications are subject to change without notice.