


## active twisted pair video transceiver

### Features:

- Transmits full motion colour or monochrome video signal
- Five-position distance range switch to adjust transmission strength
- Monochrome video transmission up to 2.4Km or up to 1.5Km in colour
- Built in transient protection and ground lifting
- AC24V/DC12V dual power
- Red LED: power on / off
- Power supplies included

### Installation View

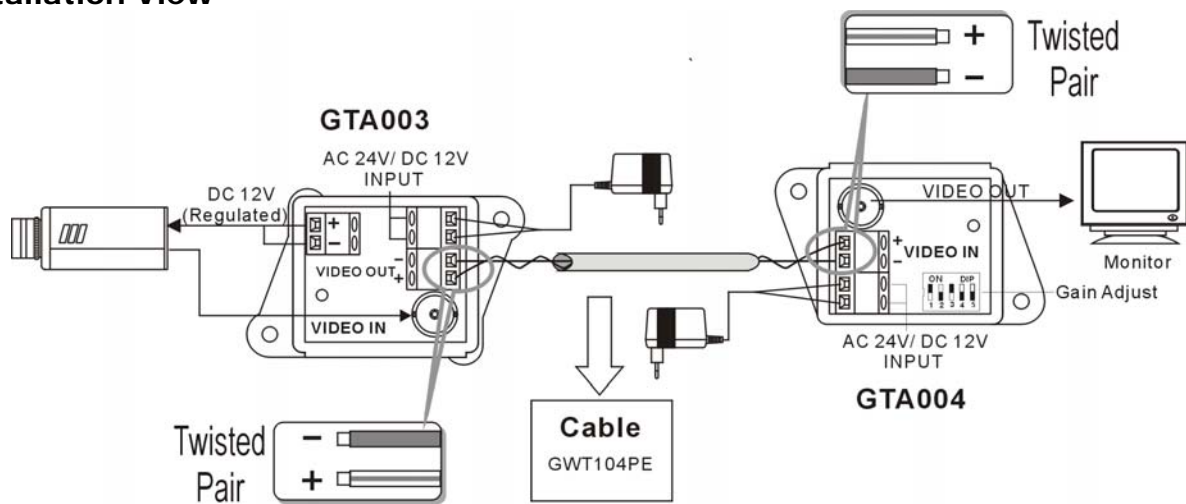

VIDEO GAIN ADJUSTMENT	Switch 1	0 ~ 300m	Switch 5	1200m ~ 1500m
	Switch 2	300m ~ 600m	Switches 5 & 1	1500m ~ 1800m
	Switch 3	600m ~ 900m	Switches 5 & 2	1800m ~ 2100m
	Switch 4	900m ~ 1200m	Switches 5 & 3	2100m ~ 2400m

	GTA003		GTA004
video input	1 Vp-p, 75 Ω (BNC Connector)	video output	1Vp-p , 75 Ω (BNC Connector)
dc input	AC 24V/ DC 12V	dc input	AC 24V/ DC 12V
dc output for ccd	DC 12V Regulated @ 300mA(max)	power consumption	40mA(max)
power consumption	40mA(max)	recommended cable	Cat 5e Cable 4-pair (24AWG)
dimensions w x h x d	49 x 42 x 45 in mm	dimensions w x h x d	49 x 42 x 45 in mm

### Genie CCTV Limited

Unit D city park, 26 watchmead, welwyn garden city, herts AL7 1LT  
 tel: +44(0) 1707 330541 fax +44(0) 1707 330543  
 website: [geniecctv.com](http://geniecctv.com) email: [info@geniecctv.com](mailto:info@geniecctv.com)