




Fig. 1- KP4 Series Panic Button Range



Fig. 2 – KP5 Series Panic Button



Fig. 3 – KP6(S) Series Panic Button

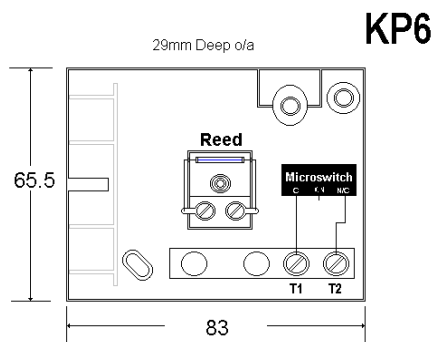

	Model		
	KP4	KP5	KP6
Grade 2 Class II	●	●	-
Grade 3 Class II	-	-	●
Reed NO/NC	●	●	●
Latch	●	-	●
Non Latch	-	●	-
Metal Key	●	●	●
Spare Keys to order	●	●	●
Micro-Switch CIO	-	-	●
Plastic	●	●	●
St/Steel (S)	●	-	●
Brass (B)	●	-	●
Knockouts End	1	1	1
Knockouts Back	-	-	-
Knockouts Side	-	-	-

	Length	Width	Height
Dimension	83	66	29mm
Dimension KP6	83	66	29mm

Options

	KP4	KP5	KP6
Smooth Buttons	●	●	●
Ridged Buttons	●	●	●

Description:

Double End Push Panic Button

Materials:

ABS / Acetal

Temperature Range:

-40°C - +50°C

Tampers:

Stainless Steel
Microswitch (KP6)

Switching Current

500mA Max DC
500mA Max AC

Contact Material:

Rhodium

Indicator:

Flag Type

Voltage Range:

1 – 100v DC
125v AC Max

Keys:

Metal Key located inside

Colours:

Plastic - White (No Suffix)
Plastic - Black (Suffix B)

Finishes: (See table)

Plastic, Brass (B), Stainless Steel (S)

KNIGHT
PLASTICS LTD
email: info@knightplastics.com

Unit 1 Clydesmuir Rd. Ind. Estate
Cardiff UK CF24 2QS
Tel: 0 (00 44) 29 20 48 81 29
Fax: 0 (00 44) 29 20 48 91 32

Drawing No: **KP4-6 Series
Panic Button**

Drawn: Chris Moorman
Date: 17/10/06

All units in mm
Do not scale



The portrayed information is © Knight Plastics Ltd
All cases of ™ Infringement will be persued.