




Product Datasheet

06 Downlights Fixed LED>Dark Light Pro Range

10112ED/W/B/W

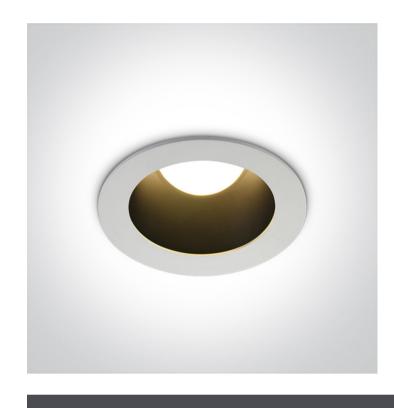

12W COB LED recessed downlight, for general lighting applications.

Complete with 300mA driver.

Complies with standard EN60598-1 and any other specific standards.













Downloads










Dimensions



110mm



75mm

Physical Specification


Item Group	06 Downlights Fixed LED
Family	Dark Light Pro Range
Order Code	10112ED/W/B/W
Colour	White-Black
Material	Aluminium
Shape	Circular
Height	75mm
Diameter	110mm
Cutout Hole Diameter	92mm
Recessed Ceiling	Yes
Depth Required	95mm
Indoor	Yes

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	12W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	300mA
Input Current Voltage	300mA 34,5V
Voltage	34,5V
Voltage Safety Class	34,5V
Voltage Safety Class Power(Watts)	34,5V <u>III</u> 10,3W
Voltage Safety Class Power(Watts) IP Rating	34,5V 10,3W IP20
Voltage Safety Class Power(Watts) IP Rating Light Source	34,5V 10,3W IP20 LED built in
Voltage Safety Class Power(Watts) IP Rating Light Source LED Type	34,5V 10,3W IP20 LED built in SMD 2835
Voltage Safety Class Power(Watts) IP Rating Light Source LED Type LED Brand	34,5V 10,3W IP20 LED built in SMD 2835 Sanan
Voltage Safety Class Power(Watts) IP Rating Light Source LED Type LED Brand LED Number	34,5V 10,3W IP20 LED built in SMD 2835 Sanan 1
Voltage Safety Class Power(Watts) IP Rating Light Source LED Type LED Brand LED Number	34,5V 10,3W IP20 LED built in SMD 2835 Sanan 1
Voltage Safety Class Power(Watts) IP Rating Light Source LED Type LED Brand LED Number F Mark	34,5V

	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	7,5-12,6W
Power Factor	0,5
Constant Current	Yes
300mA	25-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	LIFUD
Ilumination Data	
Colour Temperature	3000K
Lumen Output	720lm
Lumen Output Light Efficiency	720lm 60lm/W
Light Efficiency	60lm/W
Light Efficiency CRI	60lm/W 80
Light Efficiency CRI Beam Angle	60lm/W 80
CRI Beam Angle Illumination Diagram	60lm/W 80 60°
CRI Beam Angle Illumination Diagram	60lm/W 80 60°
Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	60lm/W 80 60°
Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	60lm/W 80 60°
Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	60lm/W 80 60° Yes
Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length	60lm/W 80 60° Yes
Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length Box Width	60lm/W 80 60° Yes 13cm
Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length Box Width Box Height	60lm/W 80 60° Yes 13cm 13cm 9cm
Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length Box Width Box Height Pcs/Carton	60lm/W 80 60° Yes 13cm 13cm 9cm

Energy Label



Certification & Warranty

Warranty	2 Years
Weee Directive	Yes

one

switch to one light!

