

06 Downlights Fixed LED>Round Downlights

10120/C



20W LED recessed downlight with interchangeable rings, IP44.  
Ideal for general lighting applications.

Rings must be order separately.

Complete with 320mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads




Dimensions

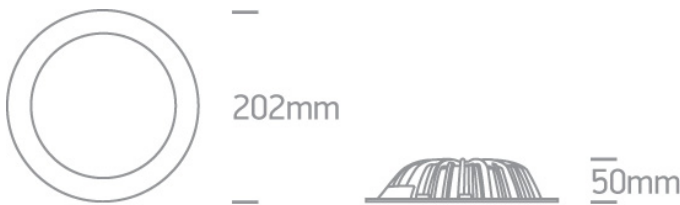

Gallery




Must be ordered separately



10100/AL



10100/G





10100/W

Physical Specification


Product Type	Gear
Item Group	06 Downlights Fixed LED
Family	Round Downlights
Order Code	10120/C
Material	Aluminium
Shape	Circular
Height	50mm
Diameter	202mm
Cutout Hole Diameter	180mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Adjustable	No

Electrical Characteristics


Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	20W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
------------	------------------


Input Current	320mA
Voltage	60V
Safety Class	
Power(Watts)	19,2W
IP Rating	IP44
Light Source	LED built in
LED Brand	Epistar
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	14,4-21W
Power Factor	0,9
Constant Current	Yes
Output	320mA
Voltage Range	45-66V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	45°C
Operating Temp	85°C
Housing Material	Plastic
Output Terminal	Cable

Illumination Data


Colour Temperature	4000K
Lumen Output	1800lm
Light Efficiency	90lm/W

CRI	75
Beam Angle	110°
Illumination Diagram	
UGR	0

Packing Info

Box Length	23,5cm
Box Width	7,5cm
Box Height	21,5cm
Box Weight	1,03Kg
Pcs/Carton	10
Barcode	5291889032144
HS Code	9405409900

Energy Label

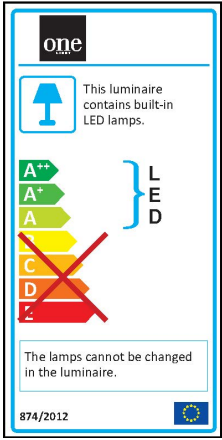

Certification & Warranty

Warranty	2 Years
----------	---------

switch to  
**one light!**

one  
LIGHT

