

08 Downlights Adjustable LED>The COB Round Downlights

## 11120B/W/C



20W COB LED extractable fitting with great flexibility on movement. Ideal for shops.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

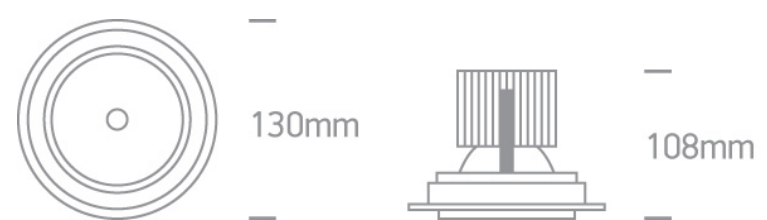

### Gallery






### Physical Specification

Item Group	08 Downlights Adjustable LED
Family	The COB Round Downlights
Order Code	11120B/W/C
Colour	White
Material	Die Cast
Shape	Circular
Height	108mm

Diameter	130mm
Cutout Hole Diameter	120mm
Recessed Ceiling	Yes
Depth Required	125mm
Indoor	Yes
Adjustable	2 Directions

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	20W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	27V
Safety Class	
Power(Watts)	19W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand

Bridgelux

Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

12,6-21W

Power Factor

0,9

Constant Current

Yes

700mA

18-30V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

50°C

Operating Temp

85°C

Housing Material

Plastic

Brand

Eaglerise

Protection

Short circuit protection

Illumination Data

Colour Temperature

4000K

Lumen Output

1600lm

Light Efficiency

80lm/W

CRI

80

Beam Angle

36°

Illumination Diagram



Packing Info

Box Weight

0,85kg

Pcs/Carton

18


Barcode

5291889044734

HS Code

9405409900

## Energy Label

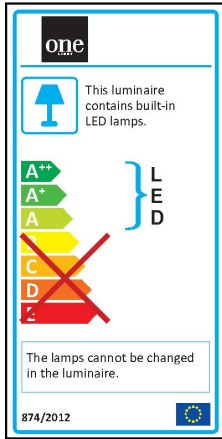

## Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

