




# **Product Datasheet**

New 2020 Edition 2>Recessed Spots Adjustable LED

## 11120E/B/W

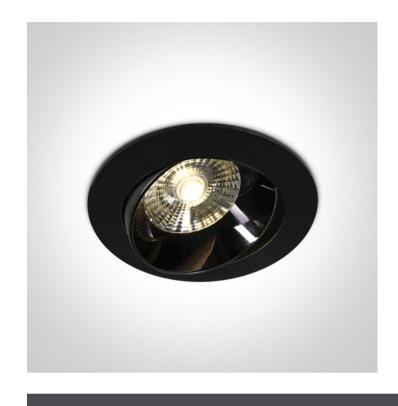

20W COB LED adjustable recessed Spot with dark chrome reflector.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.













Downloads







Dimensions





#### **Physical Specification**


Item Group	New 2020 Edition 2
Family	Recessed Spots Adjustable LED
Order Code	11120E/B/W
Colour	Black
Material	Die Cast
Shape	Circular
Height	72mm
Diameter	160mm
Cutout Hole Diameter	140mm
Recessed Ceiling	Yes
Depth Required	110mm
Indoor	Yes

### Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	20W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	36,9V
Safety Class	
Power(Watts)	18,45W
IP Rating	IP20
Light Source	LED built in
LED Type	СОВ
LED Brand	Cree
F Mark	F
Gear	
Gear Type	Led Driver
Input Voltage	220-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	12,5-20W
Power Factor	0,9
Constant Current	Yes
500mA	25-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Lifud
Illumination Data	
Colour Temperature	3000K
Colour Temperature  Lumen Output	3000K 1700lm
Lumen Output	1700lm
Lumen Output Light Efficiency	1700lm 85lm/W
Lumen Output Light Efficiency CRI	1700lm 85lm/W
Lumen Output  Light Efficiency  CRI  Beam Angle	1700lm 85lm/W
Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	1700lm  85lm/W  80  30°
Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Dark Light	1700lm  85lm/W  80  30°
Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Dark Light	1700lm  85lm/W  80  30°
Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Dark Light	1700lm  85lm/W  80  30°
Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Dark Light	1700lm  85lm/W  80  30°  Yes
Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Dark Light  Packing Info  Pcs/Carton	1700lm  85lm/W  80  30°  Yes
Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Dark Light  Packing Info  Pcs/Carton  Barcode	1700lm  85lm/W  80  30°  Yes  20  5291889064220

## Energy Label



#### Certification & Warranty

Warranty	3 Years
Weee Directive	Yes



