




Product Datasheet

New 2020 Edition 2>Recessed Spots Adjustable LED

11120E/W/W

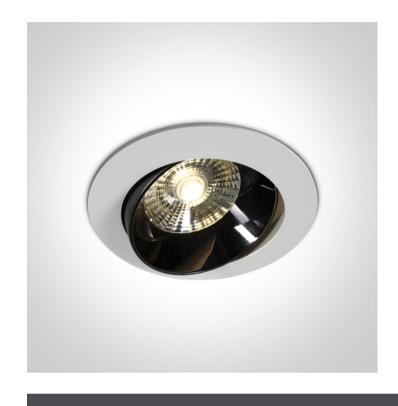

20W COB LED adjustable recessed Spot with dark chrome reflector.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.













Downloads







Dimensions





Physical Specification


Item Group	New 2020 Edition 2
Family	Recessed Spots Adjustable LED
Order Code	11120E/W/W
Colour	White
Material	Die Cast
Shape	Circular
Height	72mm
Diameter	160mm
Cutout Hole Diameter	140mm
Recessed Ceiling	Yes
Depth Required	110mm
Indoor	Yes

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	20W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	36,9V
Safety Class	
Power(Watts)	18,45W
IP Rating	IP20
Light Source	LED built in
LED Type	СОВ
LED Brand	Cree
F Mark	F
Gear	
Gear Type	Led Driver
Input Voltage	220-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	12,5-20W
Power Factor	0,9
Constant Current	Yes
500mA	25-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Lifud
Ilumination Data	
Colour Temperature	3000K
Colour Temperature Lumen Output	3000K 1700lm
Lumen Output	1700lm
Lumen Output Light Efficiency	1700lm 85lm/W
Lumen Output Light Efficiency CRI	1700lm 85lm/W
Lumen Output Light Efficiency CRI Beam Angle	1700lm 85lm/W 80 30°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1700lm 85lm/W 80 30°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1700lm 85lm/W 80 30°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	1700lm 85lm/W 80 30°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	1700lm 85lm/W 80 30°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	1700lm 85lm/W 80 30° Yes
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Pcs/Carton	1700lm 85lm/W 80 30° Yes
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Pcs/Carton Barcode	1700lm 85lm/W 80 30° Yes 20 5291889064213

Energy Label



Certification & Warranty

Warranty	3 Years
Weee Directive	Yes



