

08 Downlights Adjustable LED>The COB Semi Trimless Range

11140TR/W/W



40W COB LED Recessed Adjustable downlight, semi trimless, IP20.

Complete 1000mA driver.

Complies with standard EN60598-1 and any other specific standards



Downloads



Dimensions



Gallery



Physical Specification

Item Group	08 Downlights Adjustable LED
Family	The COB Semi Trimless Range
Order Code	11140TR/W/W
Colour	White
Material	Die Cast
Shape	Circular
Height	140mm

Diameter	180mm
Cutout Hole Diameter	165mm
Recessed Ceiling	Yes
Depth Required	170mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No

Fitting	
Input Type	Constant Current
Input Current	1000mA
Voltage	38V
Safety Class	
Power(Watts)	38W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux
LED Number	1

Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

24-40W

Power Factor

0,9

Constant Current

Yes

1000mA

24-40V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

50°C

Operating Temp

85°C

Housing Material

Plastic

Output Terminal

Connector

Brand

Eaglerise

Protection

0

Illumination Data

Colour Temperature

3000K

Lumen Output

3200lm

Light Efficiency

80lm/W

CRI

80

Beam Angle

36°


Illumination Diagram



Packing Info

Box Weight	1,6Kg
Pcs/Carton	8
Barcode	5291889044659
HS Code	9405409900

Energy Label

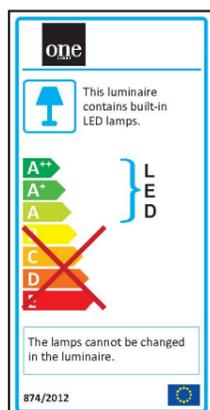

Certification & Warranty

Warranty	3 Years
Weee Directive	Yes

switch to
one light!

one
LIGHT

