


3002PGGMN

HID CLASS SE 16K bit, ISO, Prgm SIO, PVC(iCLASS SE Contactless Smart Card, 16k bit with 16 application areas, SIO Programmed (Does Not Support Standard iCLASS), PVC) (Minimum

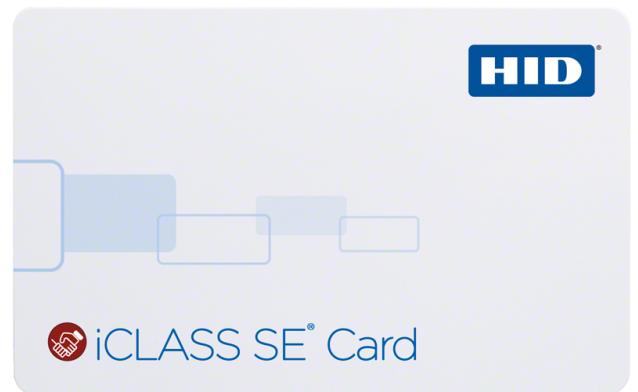

3002PGGMN

HID CLASS SE 16K bit, ISO, Prgm SIO, PVC(iCLASS SE Contactless Smart Card, 16k bit with 16 application areas, SIO Programmed (Does Not Support Standard iCLASS), PVC) (Minimum

Technical specifications

Technology

Credential type	Smart card
Credential operating frequency	13.56 MHz
Support technology	SIO 13,56 MHz

System

Reading distance	5 to 10 cm
Card slot punch	No

Ordering information

Minimum order quantity	100
Special card order form required	No

Physical

Surface cover	Plain
Material	PVC
Form factor	CR80 (Credit)
Physical dimensions	54 x 86 x 1 mm
Net weight	5.7 g
Colour	White

Environmental

Operating temperature	-40 to 50°C
Relative humidity	5 to 95% noncondensing

