



3E0650-GB-PTE


Overview

3E0650-GB-PTE is a high impact externally rated 12Vdc Illuminated Exit Button. Equipped with a robust two part cross polymer housing incorporating an integral gasket which seals the product to IP66.

The switch is supplied with an externally rated bi-colour engraved legend disc and are gasketed using an open cellular foam which once tightened maintains the IP rating.

A highly reliable and effective solution for external egress control requiring illumination.

Dimensions (mm) :

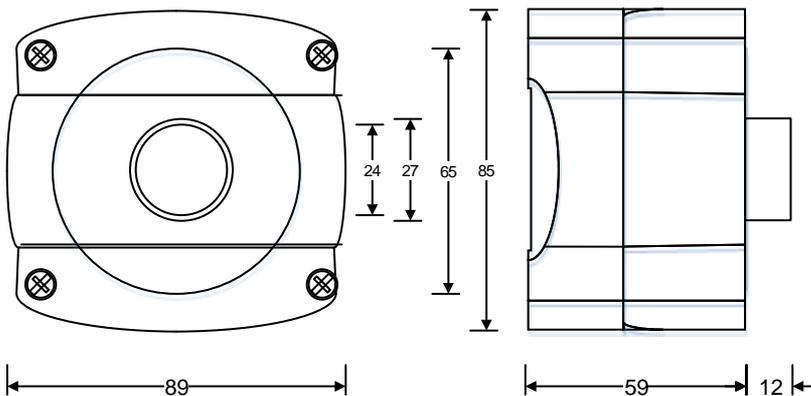

- IP66 Ingress Protection
- Momentary Contact
- High Impact
- N/O, N/C
- M16/20 Pre-moulded Knockouts

IMPORTANT: This product is for use in 12Vdc and 24Vdc applications only and should only be installed by a qualified person

Technical (switch)

| | |
|-----------------------|---|
| Switching function | Momentary, N/O, N/C |
| Life | 0.2 Million Actuations |
| Operating temperature | -25 °C to +55° C |
| Operating Force | 6N |
| Shock | Max. 150m/s ² , pulse width 11ms |
| Ingress Protection | IP66 |
| Travel | 3mm |
| Contact Bounce | ≤5ms |

Specification: (panel)

| | |
|----------|--------------------------------|
| Material | Robust cross polymer enclosure |
| Legend | PRESS TO EXIT |

Ordering information:

3E0650-GB-PTE

Illuminated button (12Vdc), momentary, IP66 surface mount (grey/black), PTE