

Accessories




0400-01 LLC Remote Test Station

- Compatible with either 50RU or 100RU
- Single Gang Stainless Steel Wall Plate
- 7" Pigtail Leads
- Includes Data Link Cable Assembly
- Allows Low Level Testing of Reflective Beam Detectors
- Approvals: UL,ULC, MEA, CSFM



0201 Alignment Tool

Remote Alignment tools is used with Fireray 2000 Project Beam Detector for alignment of the receiver at the installed location. This allows I-man to set up, service and test a Fireray 2000. Requires a 4th conductor to be run from control box to receiver head.



0893 Surface Mount Wall Bracket

Surface Mount Wall Alignment Bracket for 50RU/100RU Reflective Beam Detectors or Prism. Bracket pivots up to 45° for accurate alignment of Beam Detector or Prism.



5000-005 Universal Mounting Bracket

Universal Mounting Bracket for Fireray 5000 Reflective Beam Detector and Accessories. Bracket pivots for accurate alignment of Beam Detector and Prisms.



23835 Surface Mount Wall Bracket

Surface Mount Wall Alignment Bracket for Fireray 2000 EExd Explosion Proof Projected Beam Detector. Bracket pivots horizontally and vertically for accurate alignment of Beam Detector. (Atex Head not included).




0608 Surface Mount Back Box

Surface Mount Back Box for 50RU/100RU Reflective Beam Detectors. Two 1/2"-3/4" conduit knock-outs on each side. Finished size 9 1/4" H x 6" W x 2" D. Termination block included. Universal back plate mounting with one conduit knock-out



2390I Prism

Replacement Prisms for Reflective Beam Smoke Detectors
Also used for "Retro Mode" with the Fireray 2000.




5000-004 Long Range Prism Kit

3 Additional Prisms for use with F-5000 when the Prism installation is between 160 Feet and 330 feet from the Detector Head.




5000-006 Prism Wall Bracket

Reflector Wall Bracket comes pre-drilled to mount 1 (Up to 160 Feet) or 4 (160 Feet to 330 Feet) prisms. Hole pattern on side mounting flange similar to Unistrut. Prisms are ordered separately



5000-007 4 Prism Alignment Adaptor

Comes pre-drilled to mount 4 Prisms. Designed to mount on the Alignment Adaptor 5000-005. Prisms and Alignment Adaptor 5000-005 are ordered separately



5000-008 Single Prism Alignment Adaptor

Comes pre-drilled to mount 1 Prism. Designed to mount on the Alignment Adaptor 5000-005. Prisms and Alignment Adaptor 5000-005 are ordered separately



5000-009 Controller Back Box

Includes conduit knock-outs on top and bottom. Surface or Flush Mount. Will mount to single gang, double gang or 4 square box.



5000-010 Semi Flush Trim Plate

Mounts on the 5000-009 Controller Back Box for Semi Flush Installations.



5000-011 Detector Back Box

Back box includes conduit knock-outs on all four sides. Will mount over single gang, double gang or 4 square box. Order back box and cover plate separately




5000-012 Detector Cover Plate

Use with the 5000-011 back box. Pre-drilled to mount the 5000 Detector Head. Order back box and cover plate separately



5000-014 Ceiling Pendant Mount Bracket

Comes pre-drilled to mount F-5000 Detector Head. Supplied with 1-2 1/2" long nipple. Other lengths by contractor. Can be used for Single or Bi-Directional Applications. Includes 2 mounting plates and 1 blank cover

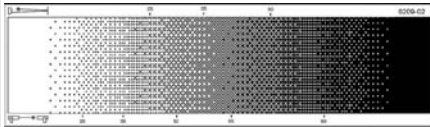

0209 Obscuration Filter

Replacement Obscuration Filter for performing UL sensitivity test for both Projected and Reflected Beam Smoke Detectors

25% to 100% Obscuration

Specifications and wiring information are provided for information only and are believed to be accurate. Fire Fighting Enterprises assumes no responsibility for their use. Data and design are subject to change without notice. Installation and wiring instructions are shipped with the products and should always be used for actual installation. For more information, contact your Sales Representative.



Fire Fighting Enterprises
1314 Ardglass Trail
Corinth, TX 76210
(T) 940-271-0435
(F) 972-534-1526
www.ffeuk.com