

KEY FEATURES:


- Appealing design and simple to use
- Integral power supply with monitored PP3 rechargeable battery
- On-board NO/NC Relay (triggered on activation of Pull Cord)
- Integral Reset button
- Power on indicator for mains supply
- Self test facility
- High visibility LED indicators



- High output audible sounder
- Reset unit with reassurance LED & sounder
- Flush mounted 'Pull for assistance' cord with reassurance LED
- Over Door indicator lamp with powerful sounder
- Battery back up includes
 - Standby Period—24 Hours
 - Alarm Period—45 Minutes

Main Control Unit (C4A-MAIN/SS):

- Integral power supply with monitored PP3 rechargeable battery
- On-board NO/NC Relay
- Integral Reset button
- Power on indicator for mains supply
- Selectable reset (3 Options)
- Battery back up includes
 - Standby Period—24 Hours
 - Alarm Period—45 Minutes
- Dimensions: 145mm x 85mm
- Flush Fitting requires 40mm Deep Double Gang Box

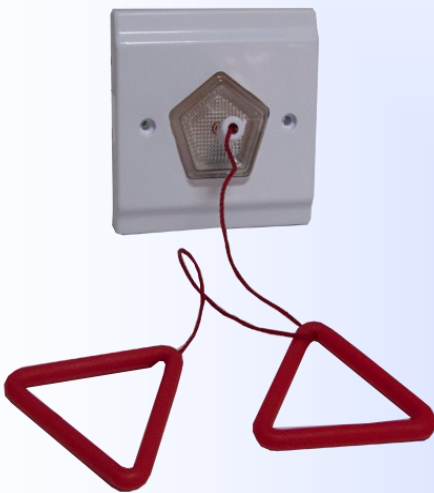

Pull Cord (C4A-PC):

- Flush mounted 'Pull for assistance' cord with reassurance LED
- Red Pull Cord with 2 x Red Handles
- Pull Cord Length: 3 Meters
- Red Handles size: 50mm x 50mm x 50mm
- Plate Dimensions: 85mm x 85mm
- Flush Fitting requires 25mm Single Gang Box
 - Only compatible with RGL C4A-MAIN/SS

Reset Button (C4A-RES/SS):

- Rated to IP65
- Integral sounder and LED indication
- Stainless Steel Reset Button
- S/S Plate Dimensions: 85mm x 85mm
- Flush Fitting requires 25mm Single Gang Box
- Only compatible with RGL C4A-MAIN/SS



Over Door Indicator (C4A-IND/SS):

- Powerful sounder and High Bright Red LED indication.
- S/S Plate Dimensions: 85mm x 85mm
- Pyramid Strobe depth: 40mm
- Flush Fitting requires 25mm Single Gang Box
- Only compatible with RGL C4A-MAIN/SS

RGL

**CALL FOR ASSISTANCE SYSTEM
(C4A/SS)**

RGL