



# DC108R4.7

2202A ARITECH W/4.7K RES SER, 8FT ARM CBL, SUP LOOP

## Overhead Door Magnetic Contact

---

The DC108 series overhead door magnetic contact is for use in the rigorous environments of commercial and industrial installations. The floor mount units are constructed with a low profile heavy cast aluminium housing. The reed switch assembly is fully encased in an exclusive polyurethane potting material to prevent damage due to moisture or humidity.

## Easy Installation

---

A wide operating gap distance of up to 7.5 cm makes installation easy and helps prevent false alarms caused by door movement or damaged and loose fitting doors.



## Details

---

- Miniature, low-profile design
- Stainless steel armoured cable for added security, reliability
- Wide working gap for overhead doors
- Small size less likely to be damaged by forklifts
- Tamper loop provided

# DC108R4.7

2202A ARITECH W/4.7K RES SER, 8FT ARM CBL, SUP LOOP

## Technical specifications

### General

Application type	Surface Mount
Contact type	4K7 resistor
Connectivity	4 wires, 2 m (armoured cable)

### Wired/wireless


Wired-wireless	Wired
----------------	-------

### Physical

Material	Aluminium
Dimensions magnet	89 x 39 x 39 mm
Dimensions contact / sensor	89 x 39 x 39 mm
Operating gap	75 mm

### Standards & regulation

EN50131 grade	Grade 2
---------------	---------

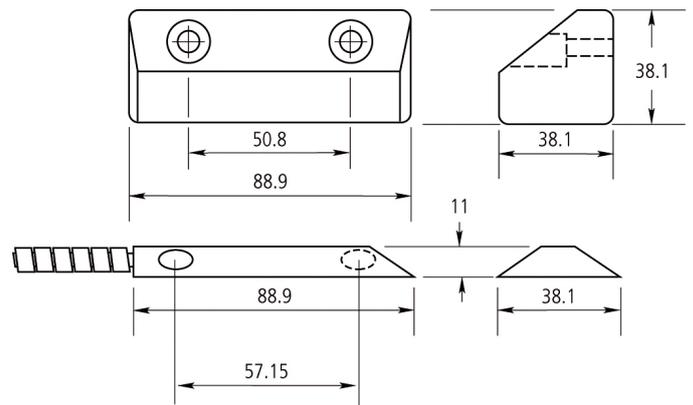

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.