


DOME-CAM - Outdoor Wi-Fi Mini Dome Camera

Keep an eye outside

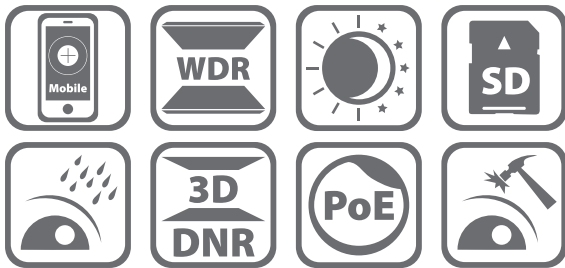

Key features

- Full-HD 1080p
- Wide Dynamic Range (WDR)
- Auto Day/Night mode
- Up to 30m IR range
- Perfect positioning with 3-axis adjustment
- Weatherproof
- Vandal-resistant IK10

Partcode	DOME-CAM
Camera	
Resolution	2 Megapixel
Lens Options	2.8mm (DOME-CAM/28), angle of view: 115° 4mm (DOME-CAM/4), angle of view 90° 6mm (DOME-CAM/6), angle of view 53.9°
Day & Night	IR cut filter with auto switch
Digital Noise Reduction (DNR)	3D DNR
Wide Dynamic Range (WDR)	120dB
Compression Standard	
Video Compression	H.264 / MJPEG / H.264+
Dual Streams	✓
Image	
Max. Resolution	1920 x 1080p (25 fps)
Image Settings	Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
Back Light Compensation (BLC)	Support, zone configurable
Network	
Network Storage	NAS (Support NFS, SMB/CIFS), ANR
Alarm Trigger	Motion Detection, Tampering Alarm, Network Disconnect, IP Address Conflict, Storage Exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
General Function	One-key reset, Flash Prevention, Dual Stream, Heartbeat, Mirror, Password Protection, Privacy Mask, Watermark, IP Address Filtering, Anonymous Access
Interface	
Communication Interface	1 RJ45 10M/100M Ethernet port
On-Board Storage	Built-in Micro SD/SDHC/SDXC slot, up to 128GB
Wi-Fi	
Wireless Standards	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4GHz ~ 2.4835 GHz
General	
Operating Conditions	-30°C to +60-°C
Power Supply	DC12V or PoE (803.3af)
Power Consumption	Max. 5W
IR Range	Up to 30 meters
Ingress Protection	IP66
Dimensions	Φ111 x 82 (4.4" x 3")
Weight	500g (1.1lbs)
SAP Code	DOME-CAM/28 : 311300203 DOME-CAM/4 : 311300204 DOME-CAM/6 : 311300205