

# Twisted Pair Cable

## Copper Cable

A cable designed by CQR to meet all aspects of the European Construction Product Regulation (CPR) EN50575.


This cable has been independently tested and certified by an accredited test facility and has been awarded a CPR Euro classification.

CQR offer the Installer, Specifier and End User a quality cabling solution and piece of mind that the product will perform to specification in the event of a fire.

DoP Certificates available online for download

# CQR

First choice for quality

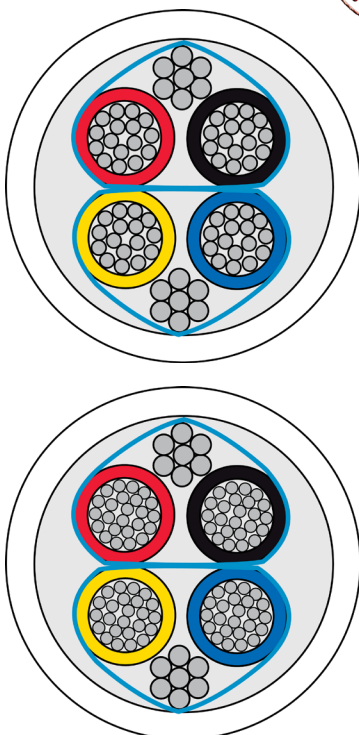

- Suitable installations requiring longer lengths of cabling such as access control and CCTV
- 16 x 0.2mm / 24 x 0.2mm Tinned Copper
- PVC Sheath
- Screened
- Manufactured to BS4737-3.30:2015 Type 2
- Fully compliant with EN50575 'CPR'

rev. 4-11/2020

### Product codes

Code	Description
CAB4/WH/100/TP	24x0.2mm 4 Core Twisted Pair 100mtrs
CAB4/WH/300/TP	24x0.2mm 4 Core Twisted Pair 300mtrs
CABS4/050WH0100TP	16x0.2mm 4 Core Twisted Pair 100mtrs

### Technical data

Core:	16 x 0.2mm	24 x 0.2mm
Resistance:	34.3 Ohms/Km	22.9 Ohms/Km
AWG:	20	18
Conductor Material:	Tinned Copper	
Conductor area:	0.503mm <sup>2</sup>	0.754mm <sup>2</sup>
Max voltage:	50 volts	
Sheathing:	PVC	
Core insulation:	PVC	
Operating temp:	70°C	
Euroclass Rating:	E <sub>ca</sub>	
Drain wire:	Soft tinned copper	
Screen:	Alu/Polyester Foil	



[www.cqr.co.uk](http://www.cqr.co.uk)

[info@cqr.co.uk](mailto:info@cqr.co.uk)

Sales: +(0)151 606 1000 Tech: +(0)151 606 6311

CQR Security Ltd, 125 Pasture Road, Moreton, Wirral, CH46 4TH, UK

Over 30 Years experience of alarm cable manufacturing in the United Kingdom

