

# EXIT BUTTONS

## Stainless Steel Illuminated Button

# CQR

First choice for quality


CQR offer a range of exit buttons designed to meet the most robust applications and to comply with Health & Safety regulations.

The Stainless Steel Illuminated request to exit button is designed to be used with access control systems.

The button can be wired as normally closed and/or normally open and be flush or surface mounted using a standard UK single-gang back box.



- Stainless Steel Illuminated button
- Stainless steel plate
- Flush or surface mount
- N/O - N/C Contacts 500k operations
- IP Rating IP5X
- Size: 86H x 86W x 30D mm (to plate)

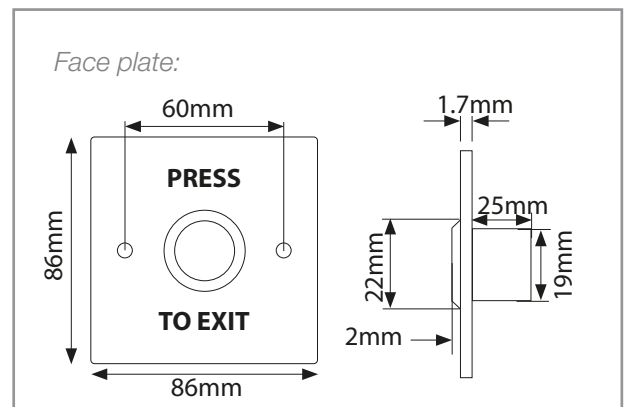

### Product code

Code	Description
XB/SIL/PTE	Stainless Steel Illuminated Button

### Technical data

Front plate:	Stainless steel
Button material:	Stainless Steel
Power Supply:	12Vdc or 25Vdc
LED colour:	Blue
Switch; voltage rating:	125-250VAC
Switch; current rating:	3A
Operating temp:	-20°C to +55°C
IP rating:	5X

rev. 1-06/2021



[www.cqr.co.uk](http://www.cqr.co.uk)

[info@cqr.co.uk](mailto:info@cqr.co.uk)

Sales: +(0)151 606 1000 Tech: +(0)151 606 6311

CQR Security Ltd, 125 Pasture Road, Moreton, Wirral, CH46 4TH, UK

UK  
CA CE

