

ELBH-LED-M3



Designed for internal and external use the weatherproof IP65 rated ELBH-LED-M3 bulkhead luminaire is suitable for a wide variety of applications. An LED charging indicator and lightweight polycarbonate construction adds to its ease of installation.


The aesthetically pleasing, slimline, lightweight fitting can be used in maintained or non maintained mode.

The ELBH-LED-M3 has a high capacity Ni-Cd long life battery and highly efficient advanced circuit design, giving you a stylish energy efficient LED luminaire option.

These features make the ELBH-LED-M3 an excellent energy efficient choice for internal and external applications where space, corrosion, dust or damp can be an issue.

Features at a glance

- **Maintained or non maintained modes**
- **Energy efficient LEDs**
- **Stylish slimline design**
- **IP65 rated**
- **Self adhesive legend kit available**
- **Screw fitted diffuser**
- **Hinged gear tray**
- **LED charging indicator**

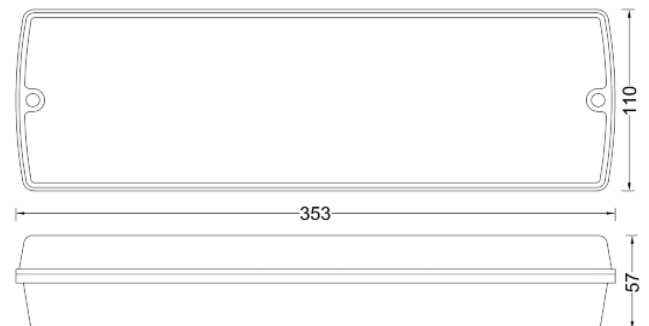

+44 (0) 1895 424505

Technical Information

- Input voltage - 230v +/- 10%
- Light Output - 1.35W
- Lumens - 81.43 lm
- LED lamps 27
- Maintained/Non Maintained
- Battery - 3.6v 1800mAh Ni-Cd
- Operating temperature - 0C to 40C
- Emergency duration - 3 hours
- Recharge time - Less than 24 hours
- Weight - 545g
- Dimensions - 352mm L x 117mm W x 80mm H
- IP Rating - IP65
- Polycarbonate enclosure with 4 x 16mm knockouts



Haes Systems Limited

Columbia House
Packet Boat Lane
Cowley Peachey
Uxbridge
UB8 2JP
United Kingdom

Tel: +44 (0) 1895 422066

Fax: +44 (0) 1895 420603

Direct Sales Line: +44 (0) 1895 424505

Email: enquiries@haes-systems.co.uk

Web: www.haes-systems.com

Company Registration No. 1146067 UK



Assessed to ISO 9001
LPCB Ref. No. 810

© 2014 Haes Systems Ltd. The information contained herein is subject to change without notice. Haes Systems Ltd shall not be liable for technical or editorial errors or omissions contained herein.

Data Sheet DS0035 Issue 1.0