

SPECIFICATION SHEET

FORTRESS LED 36W PANELS (UGR<19)



The new Fortress LED 36W Panels include a flicker free driver and with a UGR<19 for low glare applications such as technical offices and manufacturing facilities.

Applications:

• Factories • Leisure Centres • Hospitality



Image shown FLP6636-60


Specification

| | |
|-----------------------------|--------------------------------------|
| LED: | 192pcs of 4014 |
| Material: | Aluminium and polycarbonate diffuser |
| Lumen Output: | 2880lm |
| Guarantee: | 5 Years |
| Life Expectancy: | 50,000 Hours |
| Working Temperature: | -10°C - 50°C |
| Power Factor: | 0.9 |
| Beam Angle: | 120° |
| CRI: | >80 Ra |

Additional Information

- 80lm/W.
- Dimmable driver (LEDDRIVER36D) available.
- Emergency conversion (EMLEDKIT2 / EMLEDKIT3) available.
- EMLEDKIT2 - 160lm in emergency mode.
- EMLEDKIT3 - 240lm in emergency mode.
- Flicker free driver included.
- Low glare UGR<19.
- Recessed Mounting Kit (LEDP-RMKW) available.
- Surface Mounting Kit (LEDP-SMKW) available.
- White RAL9016 finish.

Dimensions

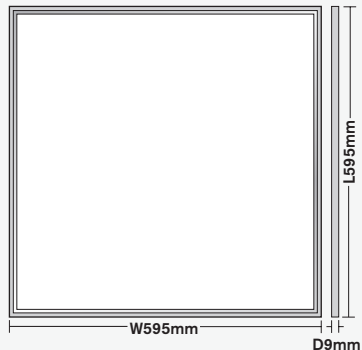

| Code | Colour Temperature | Dimensions (L x W x D mm) |
|------------|--------------------|---------------------------|
| FLP6636-40 | 4000K | 595 x 595 x 9 |
| FLP6636-60 | 6000K | 595 x 595 x 9 |