




EMERGENCY ASSIST ALARM

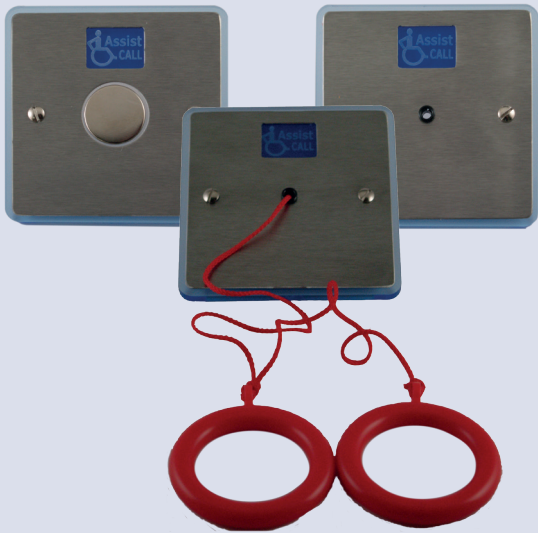

All Haescomm Emergency Voice Communications Systems (EVCS) are designed to comply fully with the requirements of BS5839-9:2011 for use as a disabled refuge system (DRS) with integrated Emergency Assist Alarm System. The HC-ACA kit provides a BS8300 compliant accessible toilet solution including the "Acknowledge" signalling required for remote locations.

The HC-ACA provides a simple solution to integrating emergency assist call systems within an EVCS, providing a single display point for all disabled calls within a building.

It can be used on a dedicated line, or may share a line with the HC-OSB disabled refuge outstation, where operation of the refuge point overrides the assistance call (ideal where a disabled toilet is adjacent to a refuge lobby).

When a call is made the overdoor and cancel units emit a two tone siren with the "Halo" flashing, when the call is acknowledged from the EVCS controller the "Halo" on these units lights steadily and the tone double beeps every 15 seconds to reassure the caller help is on the way.

As the HC-ACA is connected to a haescomm master station the plates and cables are fully end of line monitored and battery backed as standard.

The call system plates are supplied with a brushed stainless finish and a blue HALO to aid location. A standard single gang back box is required for surface mounting.

Features at a glance

- Compact design
- BS8300 'acknowledge' feature
- High volume sounder
- Blue 'halo' reassurance light
- Flush or surface mounting
- Braille enhanced cancel button
- Stainless steel finish

Models	Description
HC-ACA	Assist Call WC system kit
HC-ODP	Additional over door plate
HC-CNP	Additional cancel button plate
HC-CPP	Additional pull cord plate

+44 (0) 1895 424505

Compatibility

Compatible with all Haescomm EVCS controllers and HC-OSB outstations.

Technical Specification

Physical

Height	86mm
Width	86mm
Depth	22mm
Weight	600g
Material	Stainless steel/acrylic
Finish	Brushed

Outstation Cables

Type	Standard fire resistant
Cores	2 core 1.5mm screened
Distance	500m

Standards Compliance

EMC	EN55103-1, EN55103-2
LVD	EN60950
Product Family	BS5839-pt9, BS8300

Mounting




Connections

Cable Key

1 off 2 Core 1.5mm CSA
Standard Rated Fire Cable

1 off 2 Core 0.22mm CSA
Standard LSF (alarm Cable) Minimum

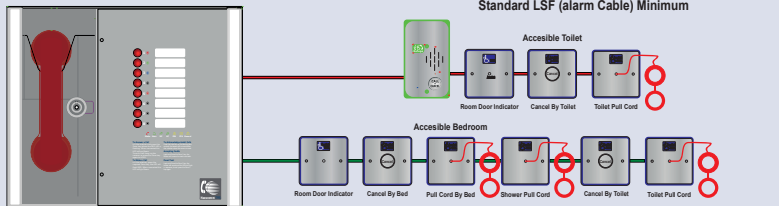

Haes Systems Limited

Columbia House
Packet Boat Lane
Cowley Peachey
Uxbridge
UB8 2JP
United Kingdom

Tel: +44 (0) 1895 422066

Fax: +44 (0) 1895 420603

Direct Sales Line: +44 (0) 1895 424505

Email: enquiries@haes-systems.co.uk

Web: www.haes-systems.com

Company Registration No. 1146067 UK



Assessed to ISO 9001
LPCB Ref. No. 810

© 2015 Haes Systems Ltd. The information contained herein is subject to change without notice. Haes Systems Ltd shall not be liable for technical or editorial errors or omissions contained herein.

Data Sheet DS0057 Issue 1.0