



Haescomm

TYPE A OUTSTATION



All Haescomm Emergency Voice Communications Systems (EVCS) are designed to comply fully with the requirements of BS5839-9:2011 for use as a fire telephone system (FT), disabled refuge system (DRS) or as a combined system when both fire telephones and disabled refuge systems are required.

An EVCS is a fixed, secure, bi-directional, full duplex voice communication system to assist fire fighters during emergencies in high rise buildings or large sites where radio communication cannot be guaranteed to work due to interference from the fire corona.

BS5839-9:2011 covers the design, installation and operation of fire telephones and disabled refuge systems in buildings, and where both systems are fitted to a building, the standard specifies these should form a single system.

The HC-OSA is a Type A EVCS outstation compatible with the Haescomm standalone and network systems.

The outstation is supplied in a brushed stainless finish with a high contrast red screen print with a rugged red telephone handset behind the push door.

A stainless steel bezel is available to allow the outstation to be recessed into a wall.

Features at a glance

- **Compact design**
- **Fully compliant to BS5839-9:2011**
- **Ruggedised handset**
- **High volume ringer**
- **Status LED**
- **Telecoil for hearing impaired users**
- **Full duplex operation**
- **Magnetic push catch**
- **Stainless steel as standard**
- **Recessing bezel available**

| Models | Description |
|--------|-------------------|
| HC-OSA | Type A outstation |
| HC-OSZ | Recessing bezel |

+44 (0) 1895 424505

Suitability

The HC-OSA is a Type A outstation as defined in BS5839-9:2011, and can be used as a fire telephone or a disabled refuge call point.

The Haescomm outstations are designed for use by multi-disability users, having high contrast signage in line with RNIB guidelines and an induction loop coil (to BSEN60118-4) in the handset.

Type A outstations are mainly for use by building management, fire wardens and fire fighters. They should be located as described in BS9999 and Building Regulations Approved Document B, these locations should have a low background noise otherwise you may have to consider acoustic hoods.

Mounting the Outstation

The outstation should be mounted at a height of 1300 to 1400mm from to the centre line of the outstation to the floor to comply with the requirements of Building Regulations Document M (Access for the Disabled).

When flush mounting a cut out of 305mm by 155mm is recommended, the bezel slides over the box and is fixed on the wall using a suitable sealant or mastic.

If the outstation is to also be used as a refuge point, suitable space must be allowed so the system can be used by a parked wheelchair.

Technical Specification

Dimensions

| | Surface | Bezel | Cut-out |
|--------|---------|-------|---------|
| Height | 300mm | 330mm | 305mm |
| Width | 150mm | 180mm | 155mm |
| Depth | 95mm | 1mm | 85mm |
| Weight | 1400g | | |


Outstation Cables

| | |
|----------|-------------------------|
| Type | Enhanced Fire Resistant |
| Cores | 2 core 1.5mm screened |
| Distance | 500m |


Standards Compliance

| | |
|----------------|-------------------------------|
| EMC | EN55103-1, EN55103-2 |
| LVD | EN60950 |
| Product Family | BS5839-pt9, BS9999, EN60118-4 |

Mounting

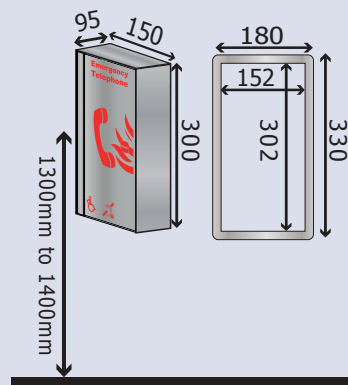

Connections

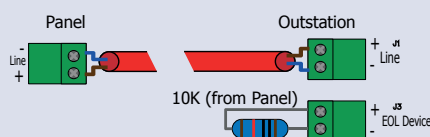

Haes Systems Limited

Columbia House
Packet Boat Lane
Cowley Peachey
Uxbridge
UB8 2JP
United Kingdom

Tel: +44 (0) 1895 422066

Fax: +44 (0) 1895 420603

Direct Sales Line: +44 (0) 1895 424505

Email: enquiries@haes-systems.co.uk

Web: www.haes-systems.com

Company Registration No. 1146067 UK



Assessed to ISO 9001
LPCB Ref. No. 810

© 2015 Haes Systems Ltd. The information contained herein is subject to change without notice. Haes Systems Ltd shall not be liable for technical or editorial errors or omissions contained herein.

Data Sheet DS0054 Issue 1.0