## **P**DOOR ENTRY

## 4G/IP SMART VISITOR DOOR ENTRY IPGUARD<sup>®</sup> MINI









**SMART VISITOR ENTRY PANEL** 

### ONE SMART TECHNOLOGY PANEL THAT DOES EVERYTHING



IPGUARD® MINI PLUS

### ONE PANEL RANGE, ALL APPLICATIONS, ANY BUILDING. SMARTPHONE TECHNOLOGY IS UNIVERSAL!








### **REVOLUTIONARY FIXING SYSTEM**

- Hidden from view
- Special tool required



Patented hidden security fixing



### **PROTECTED ELECTRONICS**

- Moulded waterproof housing
- Anti humidity heater
- Detachable access section



- Integral 4G modem
- Connection for external 4G modem (20 metres max.)
- Connection for external 4G router (80 metres max.)
- All scenarios covered





## **IPGUARD** Smart app

#### **IPGUARD APP**











### **MULTI RELAYS** CONTROLS

Open the door or vehicle gate. Speak handsfree or privately.

R

00



PREVIEWING 

Discrete preview before answering. Shows visitor calling location.


Press REFUSE to cancel the call if you do not want to answer.







**& FULL SCREEN** 



e oper

02/01/2018 17:44

02/01/2018 17:43

02/01/2018 17:39

()

### LOG OF ALL VISITOR CALLS **INCLUDING IMAGE**

Visitors received. missed calls, doors opened, access denied - all with time and date.




**REMOTE ACCESS** 

Open the door or gate by self-connecting\* - ideal if you've lost your key or missed the visitor call.

Also logged on BATICONNECT for your security.

\* The management company controls whether this feature is enabled or disabled.

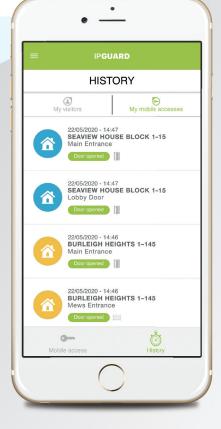

## **SECURITY**


IPGUARD<sup>®</sup> logs the time and date of when, and by whom, a visitor was allowed entry. Management can quickly identify abusers and disable their visitor door opening rights.

### **QUICK TO SET-UP**



#### COMMISSIONING

- **Network test** : checking the signal received at the panel.
  - · Good or excellent
- Bad : use an external aerial
- Test bus : check all devices are correctly cabled.



#### **IMMEDIATE STANDALONE OPERATION**

 Use the integral keypad access control to keep the door locked before activating the 4G contact.

### **BATICONNECT CLOUD 24/7/365** Programming as you wish



keyfob for residents



#### CARETAKER

Proximity keys, codes, telephone numbers



TEL868 coded radio transmitter for motorists



**MANAGEMENT COMPANY** 

Authorisation levels, multi-site



CLOUD


**ADMINISTRATOR** 

Total rights



## KCP8000 proximity

### **MODERN EFFICIENT INSTALLATIONS**

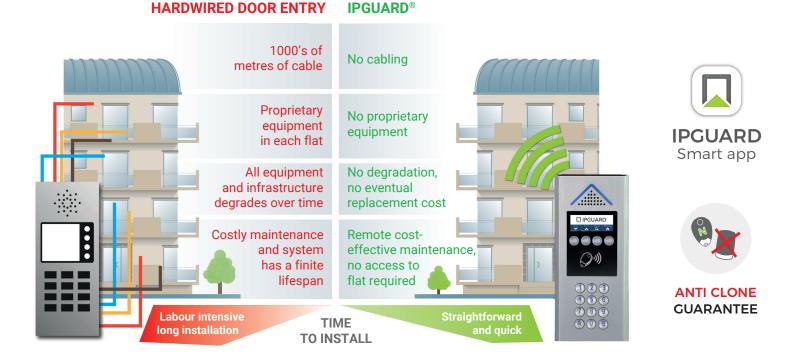

### SMART AND MODERN FOR TODAY'S WORLD NO FIXED SYSTEM PROPRIETARY DEVICES

EQUALITY ACT 2010 COMPLIANT





#### RESIDENT USES DEVICES SELECTED BY THEM

- Not one size fits all with receiving device imposed on resident by manufacturer.
- Future proof, as communications / smartphone technology evolves so does IPGUARD<sup>®</sup>.
  (5G etc, better smartphones with more features)



#### CONTACTABLE EVEN WHEN NOT AT HOME

- Always in control, always contactable.
- Information on all visitors who called your flat available on your smartphone.





#### You answer on your own devices – the ones you chose to best suit your needs

PERFECT FOR THE ELDERLY AND

PERSONS WITH DISABILITIES

- The call comes to you, not the other way around.
- You are safer. If you do not answer the call, it can route through to your carer or children.

## AUTOMATIC CALL TRANSFER, MULTI-SHARE

- Up to 3no mobiles per dwelling.
- If no answer, busy or declined, the call automatically routes forward.
- Simultaneous multi-share calling (coming soon).



## **SPECIFICATIONS**



	IPGUARD MINI	IPGUARD MINI PLUS	
REFERENCES	TP4G-A	TP4G-I	
MECHANICAL CHARACTERISTICS			
Facia dimensions (HxWxD)	270 x 120 x 14 mm	280 x 120 x 3 mm	
Backbox dimensions (HxWxD)	245 x 95 x 45 mm	254 x 95 x 60 mm	
Weight	1200 g	1200 g	
Material	Aluminium	Stainless Steel 316 / Brass	
Finish	Brushed		
Protection rating	IK09 / IP54		
ELECTRICAL CHARACTERISTICS			
Power	12 V DC		
Consumption	2A max (whilst communicating via 4G)		
Relay	2no 5 Amp rated NO/NC programmable		
Temperature	Operating -25°C to 70°C / Storage -40°C to 85°C		
FEATURES			
Colour camera	Pinhole hidden, angle of view H 60°, V 45°		
Screen	TFT colour 2.9"		
Proximity reader	Anti-vandal makrolon, illuminated		
Keypad	Large 15.6mm dia raised illuminated buttons, braille embossed		
Capacity	3000 names / flats		
Inputs	2 no		
Smartphone App	IPGUARD APP on Google Play (Android), App Store (APPLE)		
Programming	WWW.BATICONNECT.COM	WWW.BATICONNECT.COM available 24/7/365 real time	
Standard features		Customisable welcome screen – Backlight compensation – Proximity key & radio transmitter ANTI-CLONE guarantee – Smartphone access	
Mobile access	Open door via app on smart dev	Open door via app on smart devices from anywhere, at any time	
Advanced features		Hearing aid loop	

# Find out more about our smart door entry and access control solutions by visiting www.ipdoorentry.co.uk

Get in tough with the IP Door Entry Team today!



08000 156496 sales@ipdoorentry.co.uk www.ipdoorentry.co.uk f I ipdoorentry IP Door Entry Limited Unit DC4 Prologis Park Eastman Way Hemel Hempstead HP2 7DU

