

# SPECIFICATION SHEET

## LED 26W ULTRA EFFICIENT PANELS

The ultra-efficient LED 26W Panel offers 115lm/w performance and provides significant energy saving and rapid payback on investment.

### Applications:

- Commercial sites • Educational providers • Offices




Image shown LEDP26-40


### Specification

<b>LED:</b>	132pcs of 4014
<b>Material:</b>	Aluminium / PMMA
<b>Lumen Output:</b>	3000lm
<b>Guarantee:</b>	5 Years
<b>Life Expectancy:</b>	50,000 Hours
<b>Working Temperature:</b>	-10°C - 50°C
<b>Power Factor:</b>	>0.9
<b>Beam Angle:</b>	120°
<b>CRI:</b>	80 Ra

### Additional Information

- Dimmable driver (LEDDRIVER36D) available.
- Emergency conversion kit (EMLEDKIT3) available.
- EMLEDKIT3 - 346lm in emergency mode.
- Lifud flicker free driver included.
- Recessed Mounting Bracket (LEDP-RMKW) available.
- Surface Mounting Kit (LEDP-SMKW) available.
- White finish.

### Dimensions

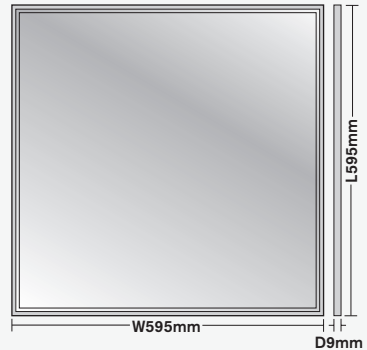

Code	Colour Temperature	Dimensions (L x W x D mm)
LEDP26-40	4000K	595 x 595 x 9
LEDP26-60	6000K	595 x 595 x 9
LEDP26-DRIVER		130 x 40 x 30