



ML-1DC

Stand Alone Mini Controller

The ML-1DC is a stand alone mini controller which is compatible with any Wiegand 26~37 bits output reader. The controller can support up to 1,000 users with data being able to be transferred.





ML-1DC

Key Features

- 1,000 Users with User Data transferred
- Multi-Access Modes - Card, Card or Pin, Card with Pin and Multi Cards / Pins
- Can connect with any reader with Wiegand 26~37 bits output
- Can connect with any Keypad reader with 4 bits, 8 bits (ASCII) or 10 bits Virtual number output
- Support Master Card function
- Low Temperature Resistance (-40°C)

Dimensions (mm)

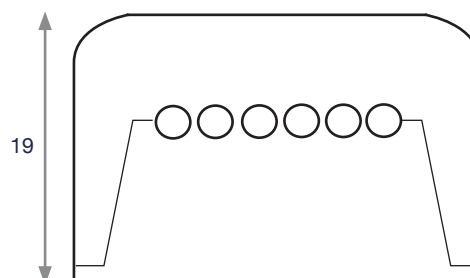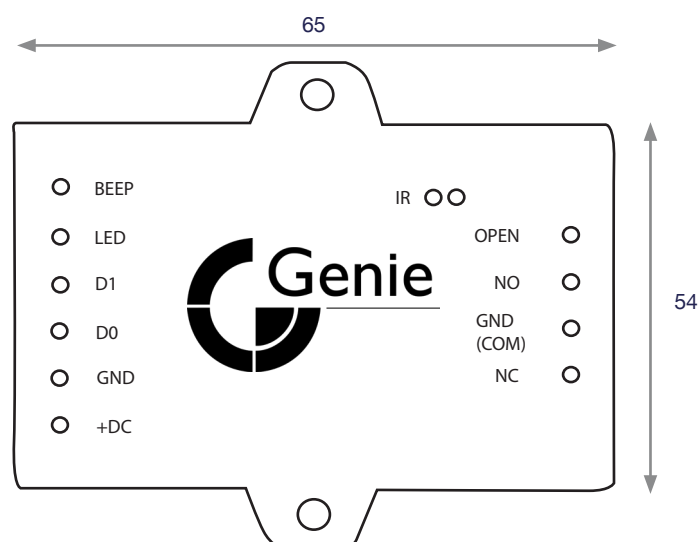



Specification

Model Number	ML-1DC
User Capacity	1,000
Operating Voltage	DC9-24V
Idle Current	<20mA
Adjustable Relay Output Time	1~99 Seconds (5 Seconds Default)
Lock Output Load	2 Amp Maximum
Wiegand Interface Input	26~37 bits
Wiegand Interface Output	26~37 bits (For User Transfer)
Operating Temperature	-40°C ~ 60°C
Operating Humidity	0 ~ 90%RH
IP Rating	IP54
Dimensions	65 (L) x 54 (W) x 19 (D) mm
Unit Weight	40g

Genie Access reserves the right to change specifications without notice. Please contact your representative to confirm current specifications.