



FIRE & SECURITY



POWER SUPPLIES



12 Volt, 2 Amp EN Grade 2

PSS12V2A/G2/(box size)

- 12 Volt, 2 Amp
- Reduces Power Consumption
- Resettable Fuses
- Saves Money
- Full Current to Load
- 3 Box Sizes available - see below

Features include:

- Reverse Battery Protection
- Over Voltage Protection
- Over Current Protection
- Battery Low Voltage Monitoring
- EPS Fault Relay and LED
- APS Fault Relay and LED

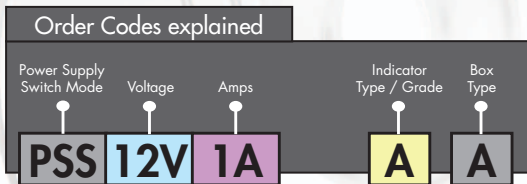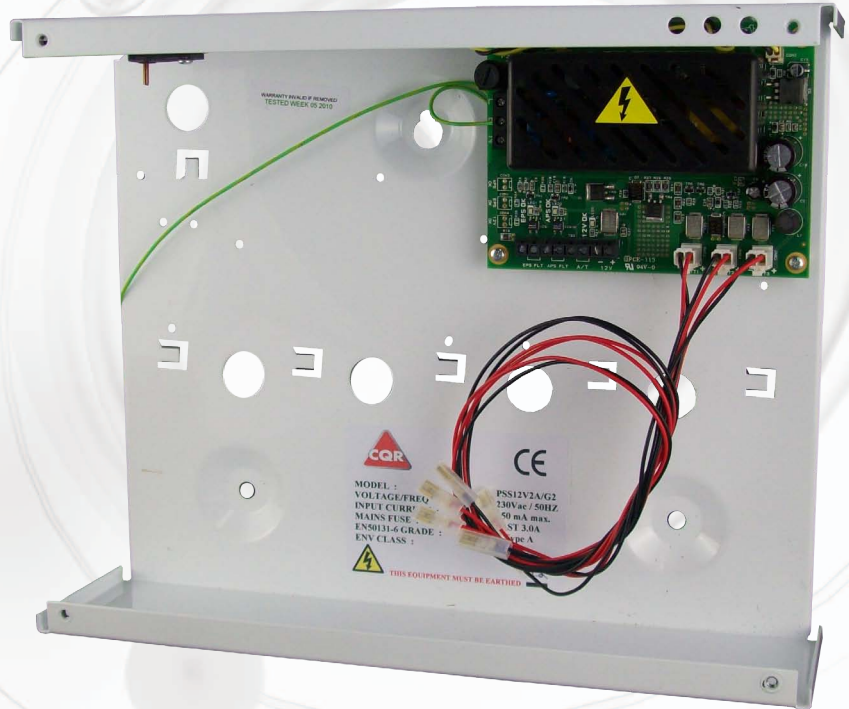

Box Type	Box A	Box B	Box C
Size	230 x 170 x 100	260 x 320 x 100	400 x 425 x 100
Weight	2.0Kg	3.5 Kg	4.5 Kg
Max No. of Batteries (12V 7AH)	1	2	3

Rated Output	2 Amp	Battery Fuse	Self Resetting	EPS Fault Relay and LED	Yes
Output Voltage (DC)	13.7 V	Reverse Battery Protection	Yes	APS Fault Relay and LED	Yes
Output Fuse	Self Resetting	Deep Battery Protection	Yes	PSU Fault Relay and LED	No
Output Ripple	<50mV	Battery Low Voltage Monitoring	Yes	AC 'On' Indicator	No
Operating Temperature	-10°C to +44°C	Battery Load Test Monitoring	No	Standby Indicator	No
Battery Learn	No	Over Voltage Protection	Yes	12V Output Fuse Fault Indicator	No
Battery Recharge Time	<72hrs	Over Current Protection	Yes		



FireBrand

2Y-LINK



CQR Fire & Security
125 Pasture Road, Moreton, Wirral, CH46 4TH, UK

Sales: 0151 606 1000 Tech: 0151 606 6311 www.cqr.co.uk info@cqr.co.uk

