




UPVC-KIT UPVC DOOR LOCKING PACKAGE

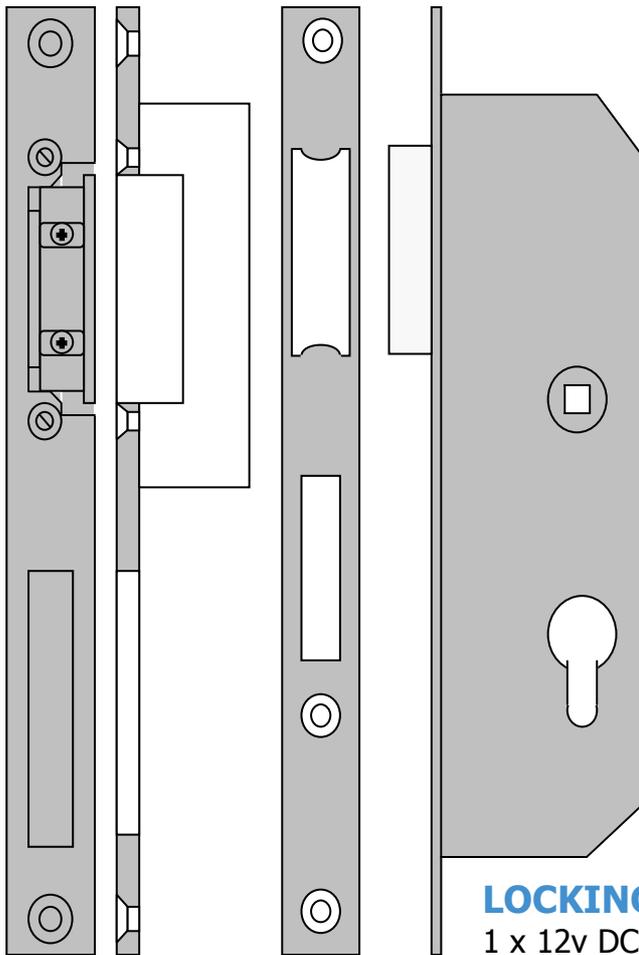

Handle locking plate



Securefix spindle

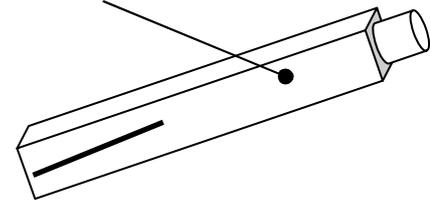

LOCKING PACKAGE:

1 x 12v DC Fail Secure Release/ 1x Lock Case/
1 x half spindle/ 1 x outside handle locking plate.

The electric release is cut into the frame.

By replacing the existing lock case with the 3567 lock, it allows the latch to work with the electric release, through the access control or door entry system.

Exit is gained by internal handle

Entry can be gained by key

The deadbolt can be thrown by use of key or thumbturn, to provide additional security out of normal hours

The existing handles can be re-used, so long as they are 92mm centres

To utilize the existing handles, the "locking plate" disables the outside handle

The "secure fix spindle" locks the spindle in to the internal portion of the lock

New external pad and internal lever sets and cylinder / cylinder and thumbturn are available if required

The existing cylinder can be re-used

PLEASE NOTE TOP & BOTTOM LATCHES or ROLLERS ETC MUST BE DISCONNECTED


HOW TO SPECIFY:

UPVC doors are varied so it is important to check measurements & handing (see diagram on reverse of data sheet), 4 elements should be checked:


1. WIDTH OF FACE PLATE
2. SIZE OF BACK SET
3. DISTANCE BETWEEN SPINDLE & CYLINDER
4. HANDING OF DOOR

SPECIALIZED SECURITY PRODUCTS Ltd. Units 18-20 Park Farm Industrial Estate, Ermine Street, Buntingford, Herts SG9 9AZ
Telephone: 01763 274223 Fax: 01763 273515

Email: sales@specialized-security.co.uk Web: www.specialized-security.co.uk

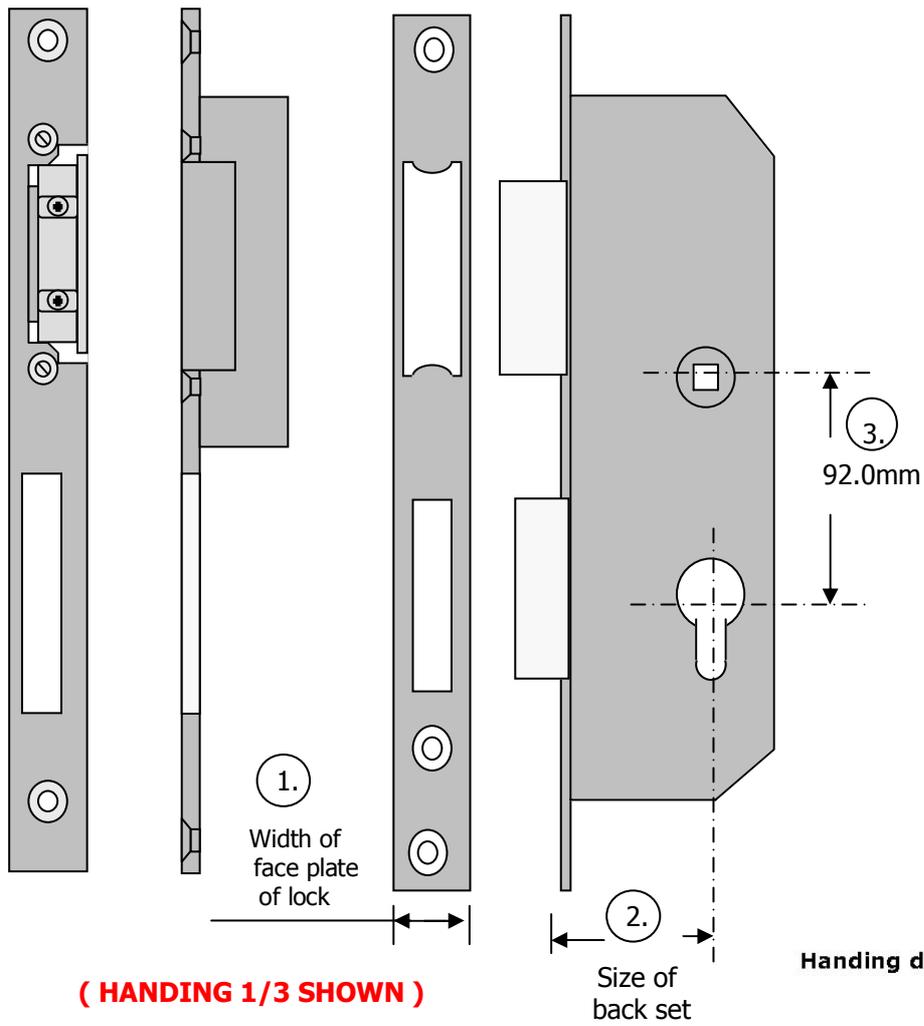

Handing diagram

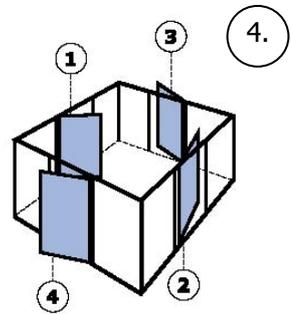

Existing handles can be re-used if they are 92mm centres
 The fixed spindle on plate is used to lock or fix the external handle
 The existing cylinder can be re-used
 If a new cylinder is required, please state size

