

Clarius®



Extra Large WL LED Illuminator

The **Clarius® PLUS** range of high performance White-Light LED illuminators are designed to provide class leading performance, long life and ultra low maintenance.

Incorporating the latest surface mount LED's with enhanced optical output and outstanding reliability, they deliver excellent night-time images.

Each unit is fitted with integrated control circuitry to carefully control LED output, delivering consistent illumination and projected working life in excess of 10 years.

The **Clarius® PLUS** range of illuminators includes a new interchangeable lens diffuser system; which allows the user to quickly and easily alter the angle of illumination. Elliptical beam profiles allow more light to be delivered where it is needed, allowing both longer distances and minimising light wastage. The system also helps to prevent overexposure of foreground objects.

As standard the illuminator includes interchangeable lensing to deliver 10° circular, 20°, 30°, 60°, 80° and 95° elliptical beam profiles.

Installation is quick and easy, requiring only a 12-32V DC / 24V AC +/- 10% .

PRODUCT CODES

VX-CW Extra Large Clarius PLUS White-Light Illuminator

FEATURES

Latest SMT LED technology
Distances up to 160m (524')
Angle 10°, 20°, 30°, 60°, 80° & 95°
Elliptical beam profiles
Low power consumption (52W)
Long life
5 year warranty
IP66 weather proof rating
Built-in photocell WL on/off
Photocell following contact
Telemetry input for remote switching
12-32V DV / 24V AC +/- 10%
CleanLITE® self cleaning lens coating technology
High quality anodised aluminium heatsink
Pressure equalisation vent




Recommended PSU ALT-60-24



Product Code	Angle	Distance		FOV	
VX-CW	10° - Circular	160m	524'	28m	92'
	20° - Elliptical	106m	349'	38m	123'
	30° - Elliptical	93m	305'	50m	164'
	60° - Elliptical	67m	218'	77m	252'
	80° - Elliptical	53m	175'	89m	293'
	95° - Elliptical	40m	131'	87m	286'

TECHNICAL SPECIFICATIONS

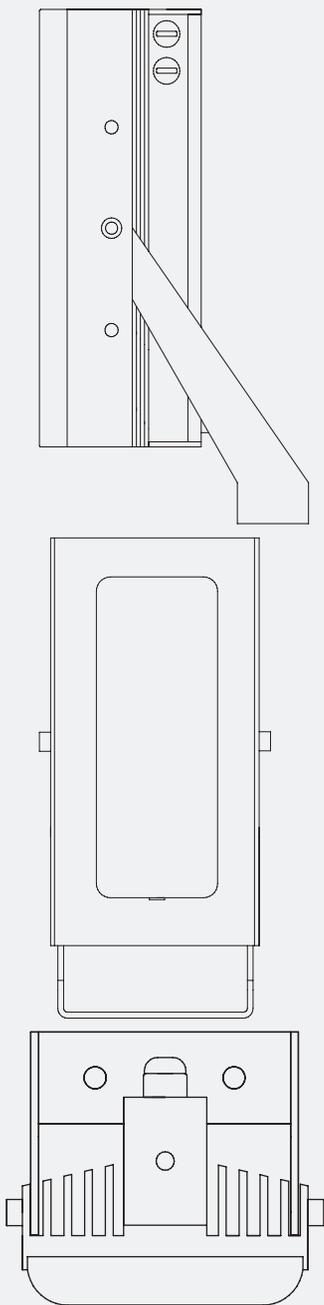

GENERAL

Electronics	High Efficiency Surface Mount High Power LED's With Advanced Current Limited Integral Control Circuitry
Construction	Robust High Quality Aluminium Extrusion
Front Window	Polycarbonate High Transmission Protective (Vandal Proof) with CleanLITE® Technology
Finish	Black Anodised
Power Cable	3m (9ft) Including Photocell Following Contact & Remote Telemetry Input
Pressure Equalisation Vent	Prevents Thermal Expansion & Pressure Cycling
Photocell	Adjustable 20 -70 Lux
Illumination	Adjustable 10% - 100%
Operating Temperature	-50° to 50°C (-58° to 122°F)
Weight	1.75Kg (3.9lbs)
Mount	Powder Coated Stainless Steel Wall Mount
Dimensions	213 x 110 x 78mm (8.39" x 4.33" x 3.07")

ELECTRICAL

Input Voltage	12-32V DC or 24V AC +/- 10%
Input Current	2.2A at 24V AC
Consumption	52W

LIGHTING OUTPUT

Lumen Output	3712lm
Wavelength	Visible Spectrum (400-750nm)
Colour Temperature	6500k
Colour Rendering Index	74-80+

CERTIFICATION

Safety	EN60598:2004	Electrical Safety
	EN60825-1	Laser Eye Safety
IP	IP66 In Accordance With EN60529;1992	
EMC	EN61000, FCC Part 15. 107 15. 108 Class B	
WEEE	Waste Electrical & Electronic Equipment European Directive 202/96/EC	
RoHS	Restriction Of Hazardous Substance European Directive 202/95/EC	

Please note GJD reserve the right to change the information within this document, without notice. **DSVX+-31-08-15**

www.gjd.co.uk | info@gjd.co.uk | +44 (0) 1706 363 998

Unit 2 Birch Business Park, Whittle Lane, Greater Manchester, Lancashire, OL10 2SX

