




**4399**

## POWER SUPPLY 12 VDC 4A PRIMARY 240 VAC

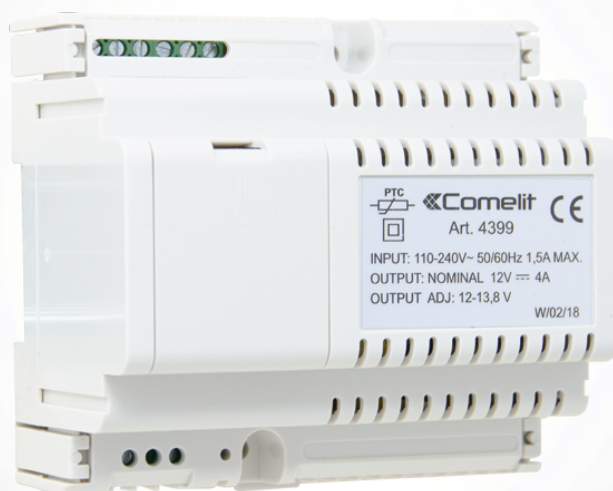

Secondary power supply 12 Vdc 4A primary 240 Vac. The secondary output voltage can be adjusted between 12 Vdc and 13.8 Vac. 6-DIN module container Dimensions: 105x95x65 mm. - Note: Not suitable for U.S. market


**4399**

## POWER SUPPLY 12 VDC 4A PRIMARY 240 VAC

### MAIN FEATURES

Plug-in power supply unit:	No
Applicable to DIN rail:	No
Number of DIN modules:	6
Max. current delivered (A):	4

### GENERAL DATA

Product height (inch):	4.13
Product width (inch):	3.74
Product depth (inch):	2.56

### COMPATIBILITY

Simplebus Top audio/video system:	No
Simplebus 2 audio system:	No
Vip system:	No
Antintruder family:	No
Ipower system:	No
Traditional system:	No
Simplified system:	No
Comelbus system:	No
Comtel system:	No

### MOUNTING/INSTALLATION

Wall-mounted:	No
---------------	----

### AUDIO/VIDEO FEATURES

Audio system:	No
Audio/video system:	No

### CONNECTIVITY

Stabilised output:	No
Parallelable power supply outputs:	No

### ELECTRICAL SPECIFICATIONS

Switching power supply:	No
-------------------------	----