


AT - 376 EXTERNAL MICROPHONE

This unobtrusive product, when connected to a DVR or audio verification control panel, makes an ideal addition to your security installation

The Microphone Unit is not adjustable.

The "Gain" of each unit has been factory set.

It is therefore important that the location of each unit to be installed is carefully considered such that it provides the optimum performance.

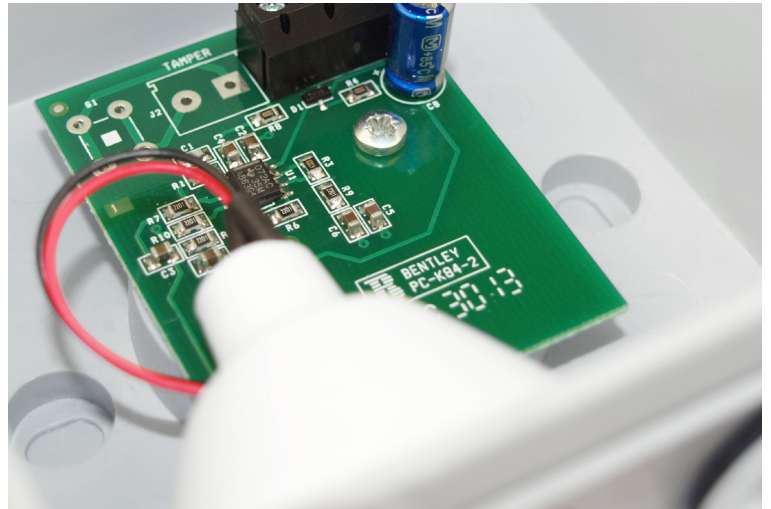

SPECIFICATION

FREQUENCY RANGE:

20Hz to 40kHz (± 3 dB)

SENSITIVITY:

12.3mV/Pa or 22dB referred to 1V/Pa (1kHz)

DISTORTION:

<0.5% (1kHz at 1V output)

OUTPUT IMPEDANCE:

100 ohms

SUPPLY VOLTAGE:

9 – 15V DC

CURRENT CONSUMPTION:

7.2mA (12V supply, no signal)



ENCLOSURE

IP 54

DIMENSIONS

120 x 97 x 55mm

PACKING WEIGHT

106 grams

