

Expandable up to 400 zones control panel

The i-onG3LM is selectable as a Grade 2 or Grade 3 control panel with 10 FSL zones, expandable up to 400 zones making it ideal for large commercial properties. Built with cyber security in its DNA the i-onG3LM is SecureConnect™ Cloud and App enabled.



Decimal expansion system

It provides 25% more zones per expander than traditional 8 zone expanders. Expanders have 10 zones in addition to the 10 zones on the end station. This makes it easy to locate zones and reduces the total number of expanders required. A 30 zone radio expander is also available.

Performance bus

4 buses with flexibus to provide maximum installation flexibility. Connect expanders and keypads to any bus and address them as though there was only a single bus.

Semi-auto addressing

Prevents address duplication for bus mounted devices, saving hours of installation diagnostic time.

Audible bus device tracing

Enables an installer to locate any bus device quickly and easily; reducing the time taken to complete maintenance and service calls.

At a glance...

- Webservice built-in
- SecureConnect™ enabled
- App for end user control and notification
- Can accommodate up to two 17 Ah batteries which are independently charged & monitored
- Four outputs (two clean contact relay, two transistorised)
- 16 communication outputs
- Ten FSL zones, expandable to 400




Powering Business Worldwide

Scantronic product data sheet

Product specification

Product code	i-onG3LM-KPZ (includes keypad)
Compliance	EN50131 PD6662:2017 Grade 2 or 3
Zones on board	10
Total zone capacity	400
Total number of buses	4 with flexibus
Number of users	400
Number of outputs	400 plus 16 communicator
Maximum number of partitions	50
Number of part sets per partition	3
Power supply	3A
Battery (maximum capacity)	2 * 17Ah
Temperature range	Environmental class 2 -10°C to 55°C 93% RH
Weight	6Kg Panel without batteries
Remote communications	Ethernet included, Choice of plug on Communicators for PSTN, GSM or 4G
Communications security	SSL/TLS - when communicating with SecureConnect App or Cloud
Dimensions	427mm (h) x 402mm (w) x 102mm (d)

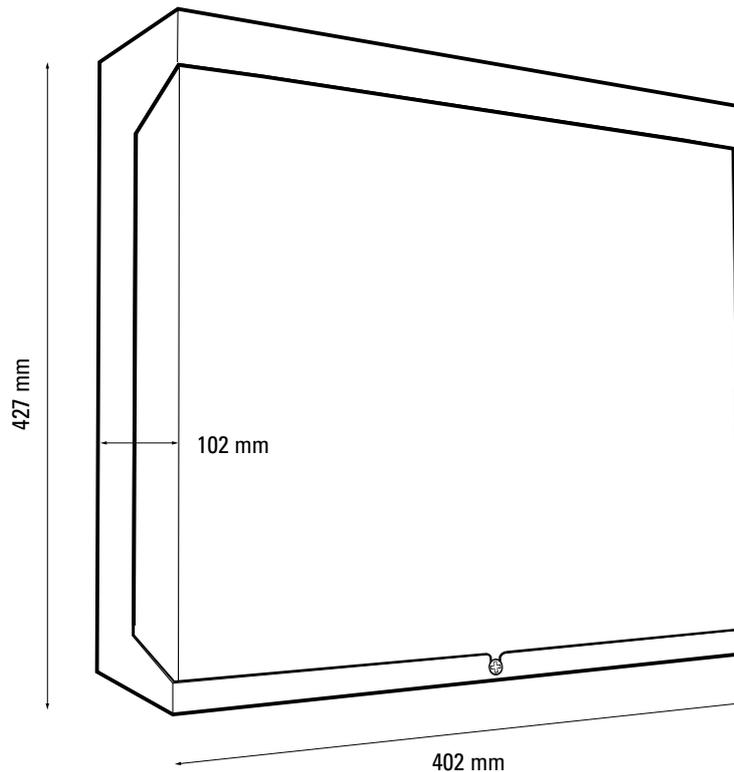

Compare product compatibility with our easy to read chart: www.eaton.com/security-works-with

Eaton
Electrical Sector
EMEA Route de la Longeraie 7
1110 Morges, Switzerland

Eaton Electrical Products Ltd
Security House,
Vantage Point Business Village,
Mitcheldean, Gloucestershire
GL17 0SX

Tel: +44 (0)1594 545 400
Email: securitysales@eaton.com
Web: www.myscantronic.com

Eaton is a registered trademark of Eaton Corporation.

All other trademarks are property of their respective owners.