

Fire Bell



Features

- Low current consumption
- Universally recognisable sound
- Diode polarised
- Choice of gong sizes (6" and 8")
- Approved to EN54 part 3

Overview

The Klaxon Fire Bell is a motorised bell designed for fire alarm applications. Its low current consumption and universally recognisable alarm sound makes it an ideal choice for many alarm systems.

Designed for ease of installation, it features a robust steel gong.

Units are finished in red and are available in two gong sizes: 6" and 8".


Depending on quantity, labels can be branded with a customer's name and logo.

- Fire
- Railway/Marine
- Security
- Hazardous Area
- Industrial
- Public Warning

Applications

- Fire alarm; emergency alarm; lift alarm

Indoor

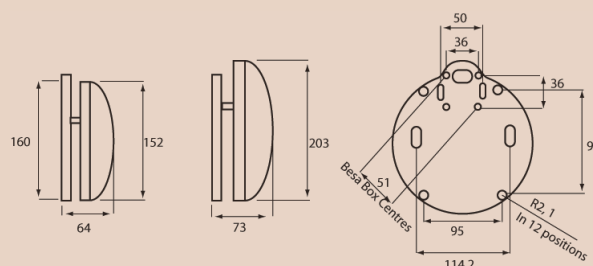

Part No.	Colours	Audibility at 1m	Tones	Voltage	Current
Indoor					
18-980851 (6" gong)	Red	Up to 95dB (A)	1	19-28V DC	20mA
18-980852 (8" gong)	Red	Up to 98dB (A)	1	19-28V DC	20mA

IP Rating: IP21C **Rating:** Continuous **Frequency:** N/A **Operating Temp:** -10°C to +55°C
Dome Construction: Steel (indoor version) **Weight:** 0.92kg (6") & 1.27kg (8") **Compliance:** EN54 3