


## MDS DIGITAL 2 ACCESSSES SHIFTER

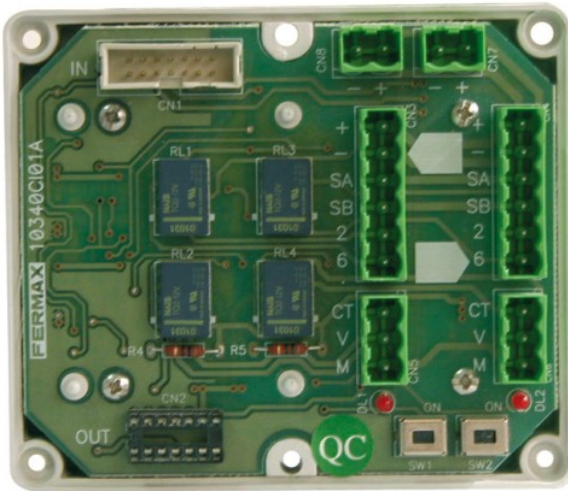

### Reference: 2379

Necessary to connect more than one panel or guard unit to the MDS Central Unit.. Add one module for every two additional panels or guard units.

## DESCRIPTION

Necessary to connect more than one panel or guard unit to the MDS Central Unit.. Add one module for every two additional panels or guard units.

MDS Digital system: Simplified BUS installation digital audio and video door entry system that lets you manage buildings and residential complexes of unlimited size and able to integrate all the community services:

- Audio and Video Door Entry Systems
- Intercommunication between accesses.
- Access Control
- Centralized and automated security

Requires Central Unit/s to manage the installation (Capacity per UC: 9999 homes, 32 accesses/guard units. Can link up to 63 UCs). Can be either general entrances or interior blocks.

MDS systems require floor Decoders to connect the homes to the installation BUS and act as insulators. Home-panel communication is private.

Wiring:

- Audio: 6-wire bus.
- Video: audio bus + Coaxial (video) + 2 power supply wires.

Maximum distance in the installation depending on the cable section used (see technical manuals).

## TECHNICAL SPECIFICATIONS

Connections: CONNECTION TO CENTRAL UNIT/PREVIOUS SWITCHER.PANEL/GUARD UNIT CONNECTIONPANEL/GUARD UNIT CONNECTION 2.CONNECTION TO NEXT SWITCHER (if present).

Power supply:

- Audio: 12 Vdc
- Video: 18 Vdc

**Weight:** 0,149687 kg

**Size of product when packed:** 6,4x10,8x9,6 cm

**EAN 13:** 8,4243E+12